CF-ATTS
HANDLING INNOVATION

产品图册 PRODUCT CATALOG



叉车属具,Forklift attachment,滑移装载机属具,Skid steer attachment,农业机械属具,Agricultural mechanical attachment,挖机属具,Excavator attachment,伸缩臂叉车属具,Teleha

龙岩市承丰机械制造有限公司
LONGYAN CHENGFENG MACHINERY MANUFACTURING CO., LTD



COMPANY PROFILE
公司简介

Founded in July, 2017, Longyan Chengfeng Machinery Manufacturing Co., Ltd has become the go to manufacturer for the OEM and ODM channel. Due to our experience, innovative manufacturing capabilities, design, and our collaborations internationally, we have created many succes with our partners in supplying them with nothing but quality attachments for fork-lifts, excavators, tractors, telehandlers, skid steers, and many other material handling equipment.

With our strict research and development, quality control, and quality assurance departments, every product has and will continue to pass CE certification with international safety standards and ISO9001 Certification. In addition, our products have acquired self-managed import and export rights throughout all over the world.

OEM and ODM channels are welcomed. Furthermore, non-standard equipment is capable for production according to the customer’ s specifications and requirements. CF-ATTS insists on the operating theory of "integrity, quality, innovation, service", offering you top-ranking quality and professional after-service.

龙岩市承丰机械制造有限公司位于龙岩市龙州工业园区。公司成立于2017年7月份，是一家专业生产叉车属具、农机属具和工程机械属具为一体的生产型企业，是全国科技型中小企业。公司凭借自身技术和管理经验，现已逐渐发展成为一家初具规模的现代化属具生产厂家，生产的属具产品得到现有客户的认可。公司现拥有3000多平方米的生产车间，拥有加工中心、数控切割机、钻床、锯床、CO2保护焊、抛丸机、校正机、喷漆线等先进的制造设备。

公司拥有自主进出口权，拥有自主品牌，同时也接受国内外各类属具的定制生产，生产的产品符合CE、AU、ISO9001等国际安全体系认证。承丰属具秉承着“诚实、质量、创新、服务”的经营理念，为客户提供高质量、高品质的产品和服务。

CONTENTS


Forklift Attachment

Grab attachment圆筒夹/管夹.....1
Container ramp坡道平台.....2-3
Man cage/work platform工作平台.....4-6
Forklift jib起吊臂.....7-17
Crane hook起吊钩.....18
Drum lifter/rotator（旋转）抱桶器.....19-21
Wheelie bin tipper翻桶器.....22
Tipping bins/containers倾翻斗.....23-27
Dirt tipping bucket液压铲斗.....28-29
Slippers货叉套.....30-31
Forks货叉.....32-33
Carriage bar型钢.....34
Side shifter侧移器.....35
Fork spreader货叉架延伸器.....36
Roll prong串杆.....37-38
Snow plough排雪犁.....39-40
Sweeper扫地刷.....41
Hinge fork倾翻叉.....42

Material Handling Attachment

Gas cylinder cage/trolley气瓶笼/推车.....44-46
Goods cages/pallet cages货笼/托盘笼.....47-53
Concrete kibble混泥土料斗.....54-55
Spill bins溢流斗.....56-58
Drop bottom bin活底箱.....59
Heavy duty crane bin重型斗.....60
Bulk bag lifter布袋搬运器.....61-63
Pallet hook起吊叉.....64-65
Spreader beam延伸吊臂.....66
Pallet pallift弹簧升降平台.....67
Pallet inverter托盘转换器.....67


Type GA Grab Attachment
管夹/圆筒夹

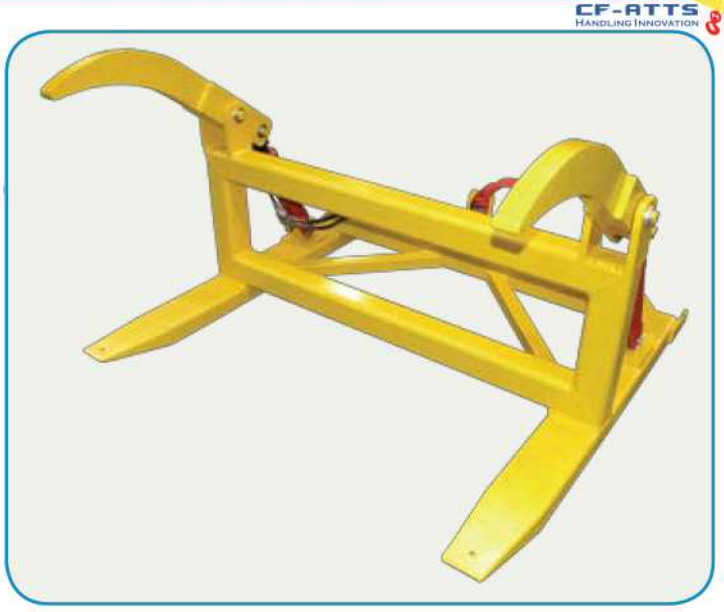


The GA grab attachment is a slip-on attachment designed to grab and securely transport poles or pipes, with models available to handle from 170-1200mm diameter.

Require one additional hydraulic function, the GA grab attachment is supplied with connection holes fitted with quick connect couplings.

GA管夹适用于各类圆筒状货物的搬运，该产品有多种型号可选，可搬运直径170-2000mm的货物，双油缸设计，配有快接油口，使用方便。

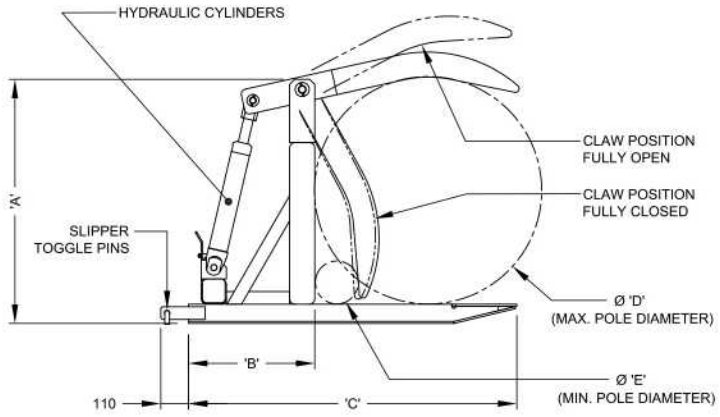


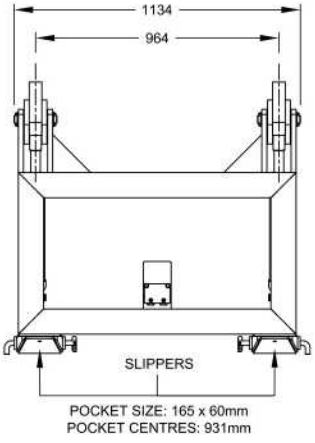


Type 型号	参数SPECIFICATION				
	载荷SWL(kg)	中心L/C(mm)	重量Weight(kg)	HCG(mm)	VCG(mm)
GA-06	2500	1100	245	600	210
GA-09	2500	950	265	420	300
GA-12	2500	1300	375	580	455

Type 型号	尺寸DIMENSIONS(MM)				
	'A'	'B'	'C'	'D'	'E'
GA-06	741	800	1300	600	170
GA-09	966	500	1300	900	170
GA-12	1366	700	1800	1200	300



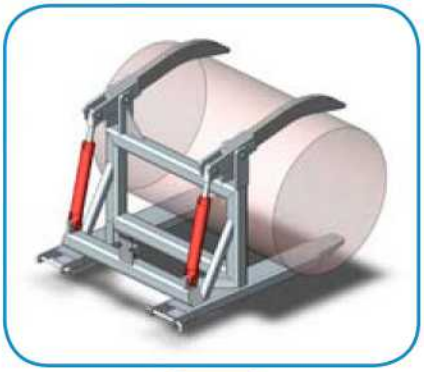

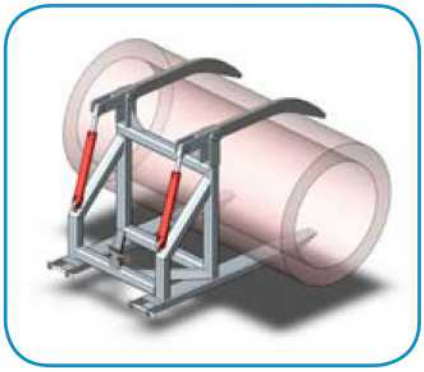

Type CRN65 Container Ramp
坡道平台



The CRN65 container ramp is designed for bridging into standard containers from ground level. The self-levelling lip allows for full load capacity when on slightly uneven ground. The ramp footing folds up to allow access to the fork slippers for transport. Hand grip loops are provided for this purpose. The standard finish is painted safety yellow.


该集装箱坡道平台适用于各类标准集装箱，方便叉车往集装箱内搬运货物，配有连接链条，使用过程中不会脱落，保证安全。前端可折叠，方便运输。表面喷安全黄。


* Safe working load/安全载荷: 6500kg
* Fork pocket size/货叉套尺寸: 165x60mm
* Fork pocket centre/货叉套中心: 775mm
* Unit weight/净重: 275kg
* Width/宽度: 2200mm
* Length/长度: 2000mm








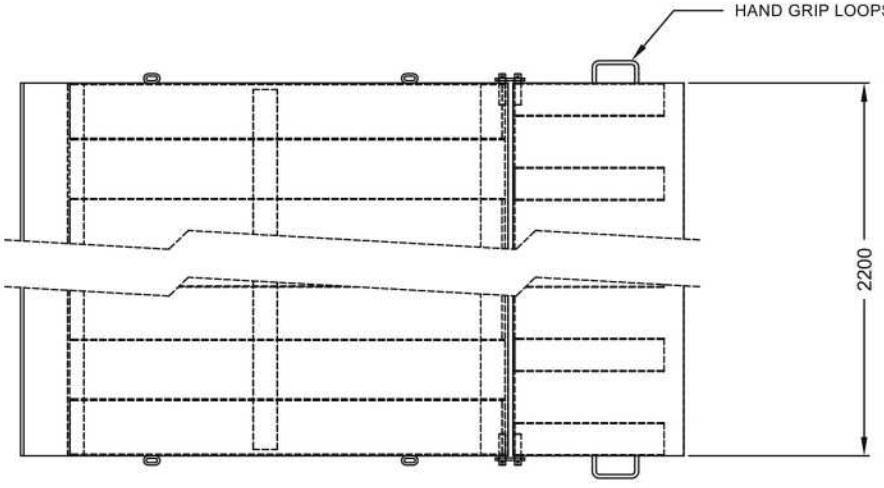

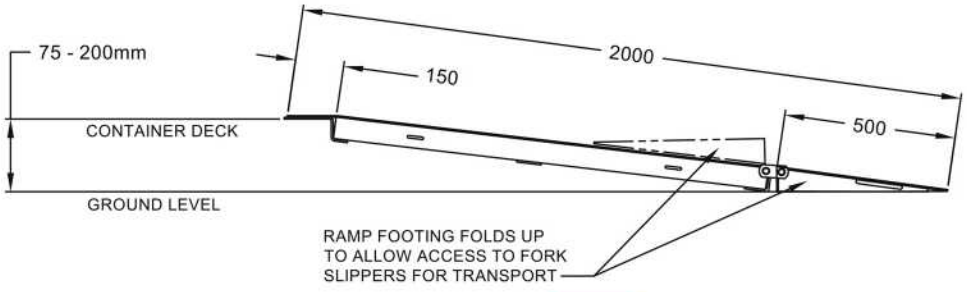


Type CRS8 Container Ramp
坡道平台

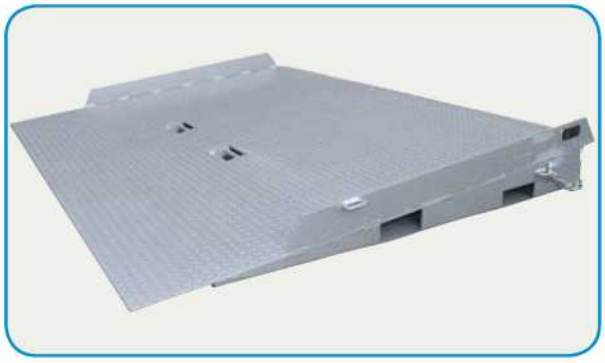

The CRS8 container ramp has been sesigned for fast positioning and removal. Fitted with pockets each side, plus flip-up front tine pockets, this ramp can be manoeu-vred easily in confined spaces. Raised side plates prevent the forklift from driving off the side. The tread plate decking is fully guessted undermeath to eliminate fatigue. Securing safety chains both sides of the ramp for connection to the container, painted or galvanized finish.


该款集装箱坡道平台能够快速接合集装箱与地面，亦可快速撤离，两侧配有连接链条，使用过程中不会脱落，保证安全。两侧焊有护栏，防止叉车掉落。表面镀锌或喷漆。

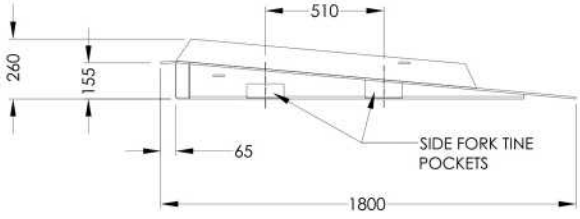

* Safe working load/安全载荷: 8000kg
* Driveway width/可行驶宽度: 2320mm
* Unit weight/净重: 410kg
* Length/长度: 2000mm


Type CRL8 Container Ramp
坡道平台



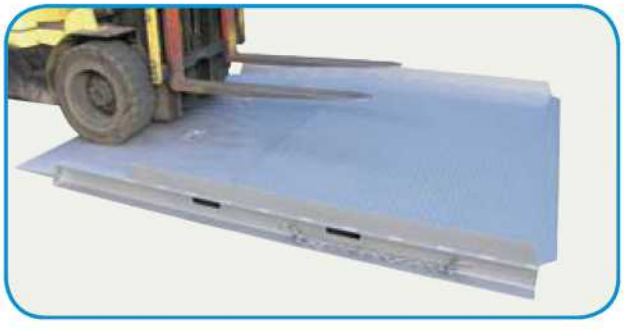

The CRL8 container ramp has an overall length of 3m(1.5m of which is horizontal) allowing even easier placement and removal of the first and second line of pallets in a container.
Fork pockets are proveded either side of the ramp along with flip-up front tine pockets for ease of transport. Securing safety chains both sides of the ramp for securing to the container. Galvanized or painted finish.

CRL8坡道平台总长约有3m长，（水平长度约1.5m），能够更轻松地搬运集装箱内第一二排的托盘。叉车从侧面、正面都可搬运该坡道平台，使用方便，两侧配有安全链条及护栏，保证叉车在装卸过程中的人员安全及货物安全。表面喷漆或镀锌。

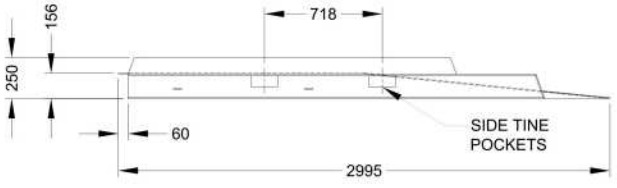

* Safe working load/安全载荷: 8000kg
* Unit weight/重量: 600kg
* Driveway width/行驶宽度: 160x65mm
* Overall length/总长: 3000mm

Type WP-N Work Platform/Mancage
可折叠式工作平台



The WP-N work platform has been designed for forklift use to safely carry out tasks of “short duration” and “occasional usage” such as maintenance or stocktake. Manufactured strictly in accordance with AU standard AS 2359.1, the type WP-N work platform is suitable for a maximum of two people. Supplied with slipper locking pins and two harness anchor rings. Galvanized or painted finish.

WP-N工作平台可与叉车配套使用，可用于一定高度的维修操作，安全方便，但不可过长时间使用，使用前请认真阅读安全提示。最多可承载2人同时工作。货叉套端部配有安全插销，确保使用过程中的稳定性和安全性。可折叠运输，节省空间。

* Safe working load/安全载荷: 250kg
* Load centre/载荷中心: 600mm
* Unit weight/重量: 110kg
* Fork pocket size/货叉套尺寸: 160x60mm
* Fork pocket centre/货叉套中心: 640mm

Type WP-MS Work Platform/Mancage
可折叠全网面工作平台



The WP-MS work platform has full mesh infill panels(50*50*4mm mesh), preventing objects from falling from the platform. Unit is supplied standard as a “flat-pack”(1230*1150*250mm), or may be fully assembled upon request. Galvanized or painted finish.

* Safe working load/安全载荷: 250kg
* Load centre/载荷中心: 600mm
* Unit weight/重量: 122kg
* Fork pocket size/货叉套尺寸: 160x65mm
* Fork pocket centre/货叉套中心: 640mm

WP-MS全网面工作平台可与叉车配套使用，可用于一定高度的维修操作，安全方便，但不可过长时间使用，使用前请认真阅读安全提示。最多可承载2人同时工作。货叉套端部配有安全插销，确保使用过程中的稳定性和安全性。可折叠运输，节省空间。

Type WP-G Work Platform/Mancage
工作平台


With a fully welded construction, the WP-G work platform is supplied ready for use. The upper protection panel is bolted into position, being removable for transport and storage purpose. The WP-G is fitted with a self closing gate and bow lock for added security, slipper pins are supplied to secure the cage to the forklift tines. Galvanized or painted finish.

WP-G工作平台可与叉车配套使用，可用于一定高度的维修操作，安全方便，使用前请认真阅读安全提示。最多可承载2人同时工作。货叉套端部配有安全插销，确保使用过程中的稳定性和安全性。





* Safe working load/安全载荷: 250kg
* Load centre/载荷中心: 600mm
* Unit weight/重量: 115kg
* Fork pocket size/货叉套尺寸: 165x65mm
* Fork pocket centre/货叉套中心: 640mm

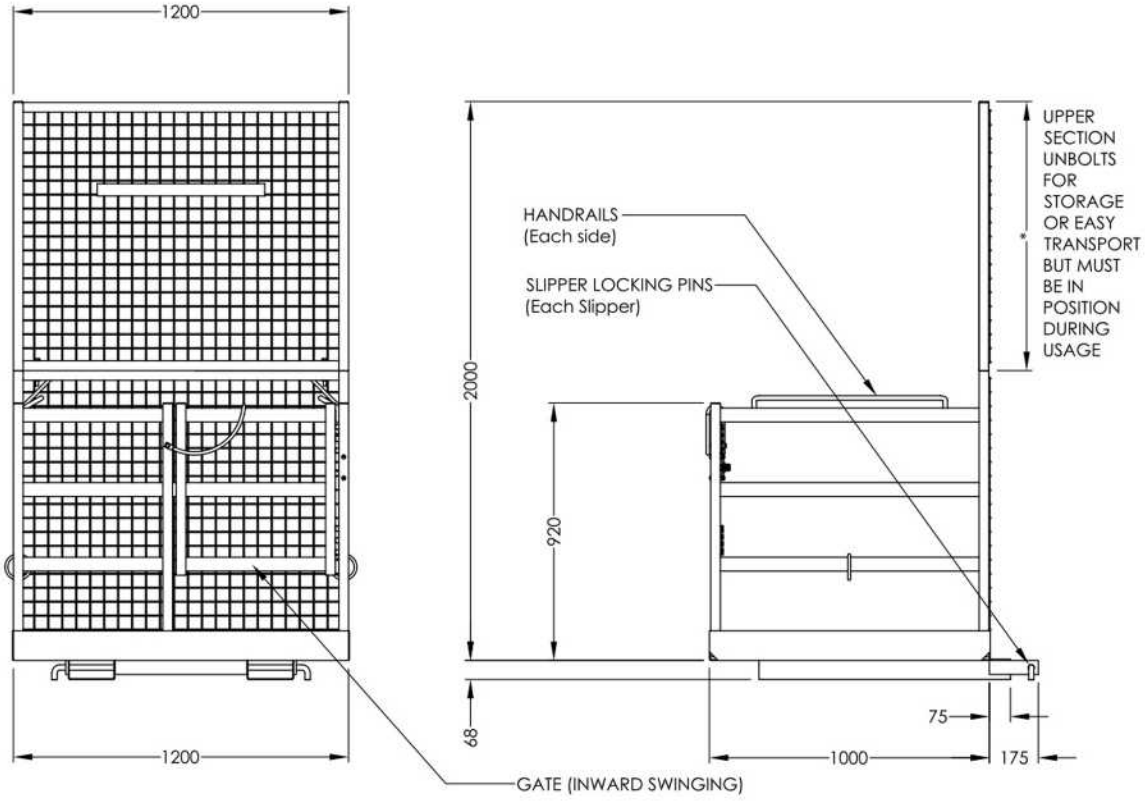

PLEASE NOTE: The use of a WP-G Work Platform on a forklift truck should not be considered if the capacity of that forklift is less than 1835kg for a counterbalanced type or 1095kg for a straddle type forklift.


Type WP-NRC Crane Mancage
吊式工作平台

The WP-NRC crane mancage measuring 1.2x1.1m is suitable for use with up to 4 people. Work performed in this cage should be limited to special tasks of short duration in situations where it is necessary to elevate personnel where it is not practicable to erect scaffolds or use a specially designed device. Integrated fork arm slippers are provided for transport purposes only. Galvanized or painted finish.



WP-NRC工作平台可与行车、吊车配套使用，可用于一定高度短时间的维修操作，安全方便，使用前请认真阅读安全提示。最多可承载4人同时工作。底部货叉套是为了运输方便而设计，表面喷漆或镀锌。

* Safe working load/安全载荷: 500kg
* Unit weight/重量: 310kg

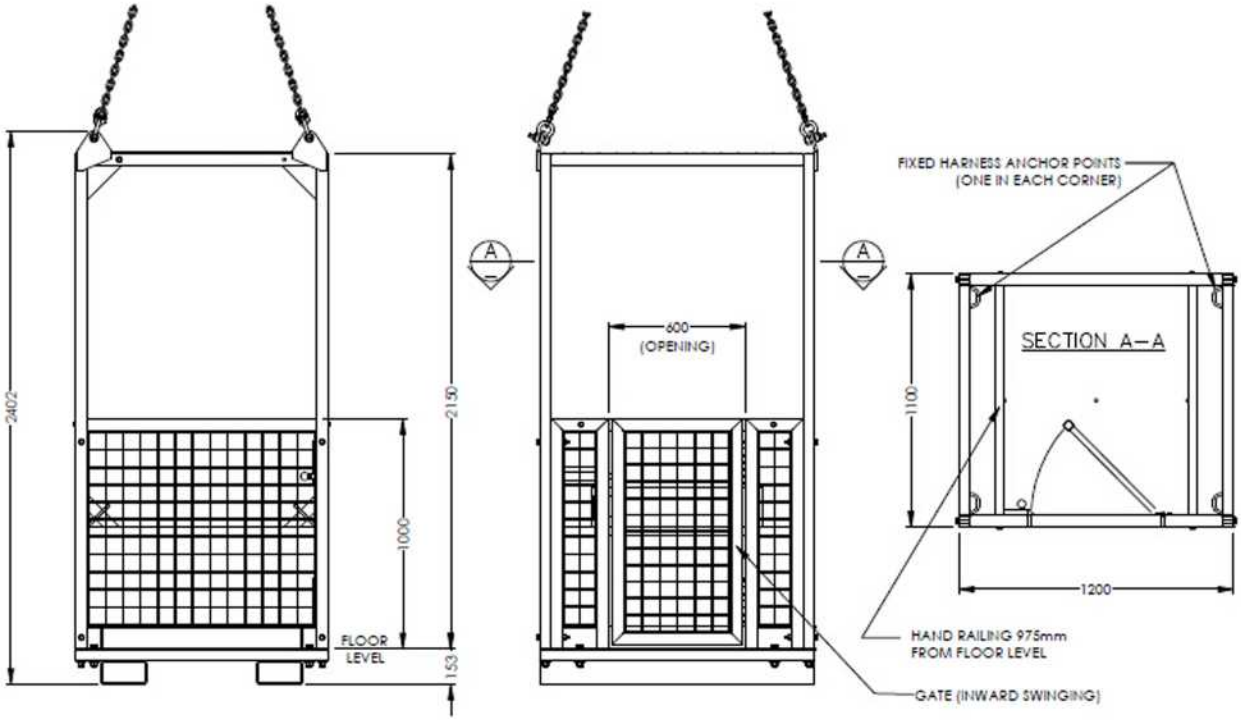


Type FJS2.5 Fixed Jib Short-2.5T
短起吊臂



The FJS2.5 fixed jib allows for additional lifting height with the extension beam being raised above the fork pockets. The overall length when retracted is 1.3m, and when extended is 2m. Painted or galvanized finished.

该起吊臂安装便捷，主要应用于只有叉车却没有行车、但又需要进行货物吊装的场合，设计成伸缩臂，吊装长度更灵活，表面喷漆或镀锌。

*最大承载SWL(max): 2500kg
*货叉套尺寸Fork pocket size: 185x65mm
*货叉套中心Fork pocket centre: 250mm
*净重Unit weight: 100kg

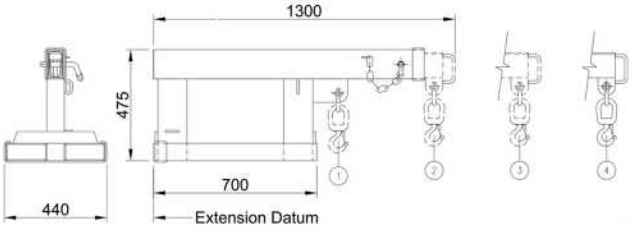

SWL Per Position每个点承载				
位置Position	1	2	3	4
伸缩长度Extension(mm)	790	1200	1580	1960
承载SWL(kg)	2500	1200	900	750




Type FJL2.5 Fixed Jib Long-2.5T
长起吊臂

The FJL2.5 has a 3.5m exension which allows for long reach lifts. The overall jib length when retracted is 2.1m. Painted or galvanized finished.

该款长起吊臂伸缩范围从0.95m-3.5m，应用范围广，表面镀锌或喷漆。

*最大承载SWL(max): 2500kg
*货叉套尺寸Fork pocket size: 185x65mm
*货叉套中心Fork pocket centre: 250mm
*净重Unit weight: 130kg

SWL Per Position每个点承载								
位置Position	1	2	3	4	5	6	7	8
伸缩长度Extension(mm)	950	1410	1870	2000	2380	2760	3140	3520
承载SWL(kg)	2500	2500	1900	1650	1250	650	380	240

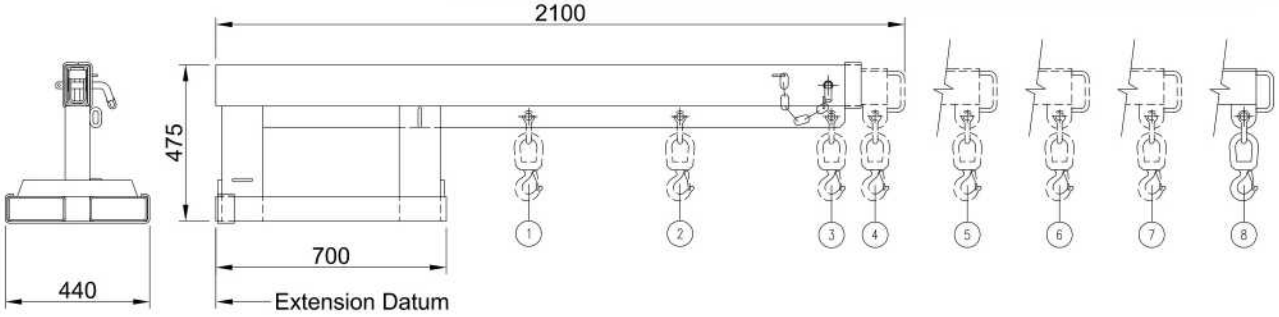

Type FJS45 Fixed Jib Short-4.5T
短起吊臂




The FJS45 fixed jib is designed as an affordable general purpose jib able to manoeuvre in confined spaces, with a 1.9m reach when fully extended. The overall jib length when closed is 1.25m. Painted or galvanized finished.

该4.5T短起吊臂安装便捷，适合用于比较狭窄的空间吊装货物，伸缩长度1.25-1.9m,表面喷漆或镀锌。

*最大承载SWL(max): 4500kg
*货叉套尺寸Fork pocket size: 185x65mm
*货叉套中心Fork pocket centre: 290mm
*净重Unit weight: 95kg

SWL Per Position每个点承载				
位置Position	1	2	3	4
伸缩长度Extension(mm)	670	1165	1545	1925
承载SWL(kg)	4500	2900	1300	750

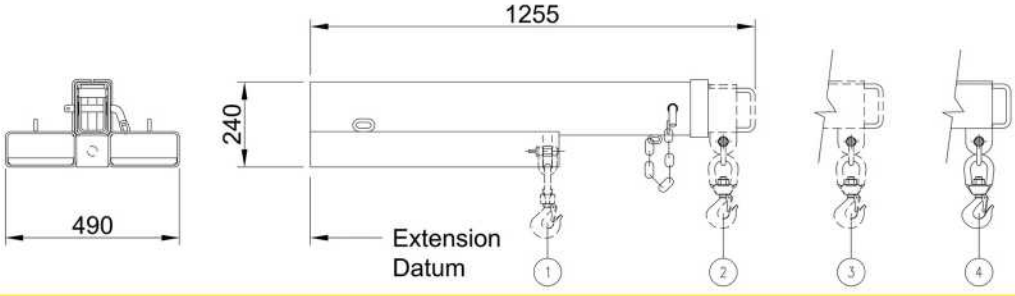




Type FJL45 Fixed Jib Long-4.5T
长起吊臂

The FJL4.5 has a 3.5m reach when fully extended. Overall length when closed is 2m. Painted or galvanized finished.

该款长起吊臂伸缩范围从0.87m-3.5m，应用范围广，表面镀锌或喷漆。

*最大承载SWL(max): 4500kg
*货叉套尺寸Fork pocket size: 185x65mm
*货叉套中心Fork pocket centre: 290mm
*净重Unit weight: 140kg

SWL Per Position每个点承载						
位置Position	1	2	3	4	5	6
伸缩长度Extension(mm)	870	1945	2325	2705	3085	3465
承载SWL(kg)	4500	1300	750	560	380	200

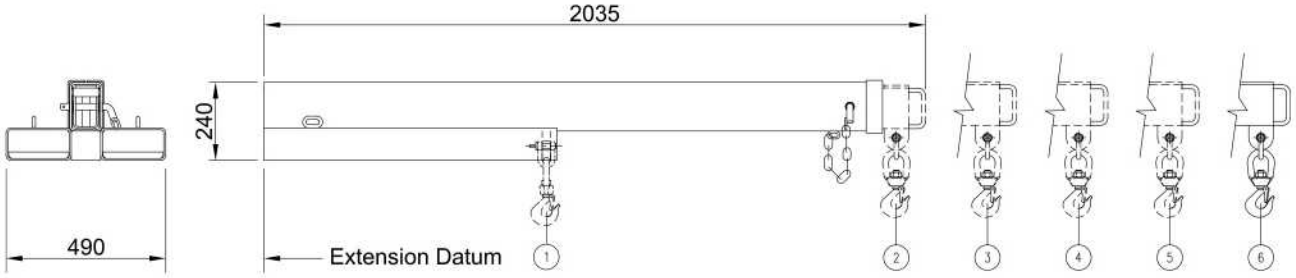

Type FJS5 Fixed Jib Short-5T
短起吊臂




The FJS45 fixed jib has a1.96m reach when fully extended, and an overall length of 1.3m when retracted. The jib is secured to the forklift by a safety chain. Painted or galvanized finished.

该5T短起吊臂安装便捷，伸缩长度1.3-1.96m，配有安全链条，表面喷漆或镀锌。

*最大承载SWL(max): 4750kg
*货叉套尺寸Fork pocket size: 185x75mm
*货叉套中心Fork pocket centre: 275mm
*净重Unit weight: 130kg

SWL Per Position每个点承载				
位置Position	1	2	3	4
伸缩长度Extension(mm)	780	1200	1580	1960
承载SWL(kg)	4750	2400	1800	1500

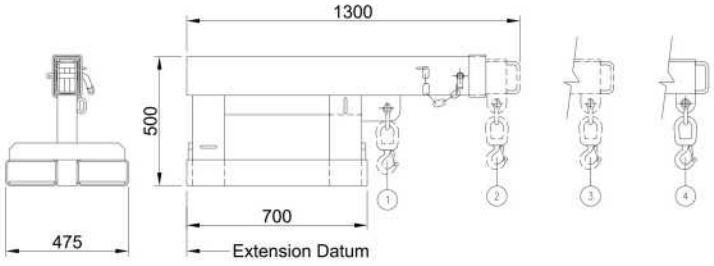




Type FJL5 Fixed Jib Long-5T
长起吊臂

The FJL5 has a 3.5m reach when fully extended. Overall length when closed is 2.1m. Painted or galvanized finished.

该款长起吊臂伸缩范围从0.93m-3.5m，应用范围广，表面镀锌或喷漆。

*最大承载SWL(max): 4750kg
*货叉套尺寸Fork pocket size: 185x75mm
*货叉套中心Fork pocket centre: 275mm
*净重Unit weight: 170kg

SWL Per Position每个点承载								
位置Position	1	2	3	4	5	6	7	8
伸缩长度Extension(mm)	935	1395	1855	2000	2380	2760	3140	3520
承载SWL(kg)	4750	4275	3800	3300	2500	1300	760	480

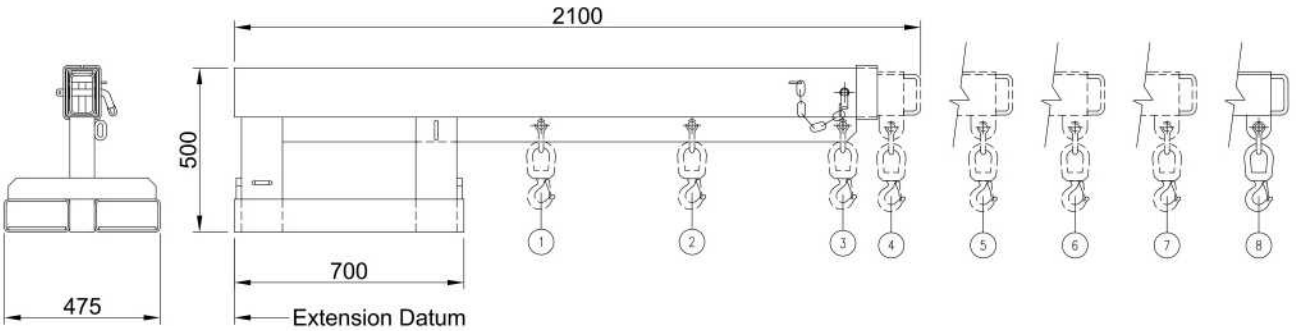

Type FJS75 Fixed Jib Short-7.5T
短起吊臂




A general purpose jib suitable for large forklifts, the jib is fitted with wide pocket centres, also suited for forklifts fitted with special hydraulic tine positioners. Overall length when retracted is 1.39m. Painted or galvanized finished.

该7.5T短起吊臂适用于大吨位叉车上，伸缩长度1.39-2m,配有安全链条，表面喷漆或镀锌。

*最大承载SWL(max): 7500kg
*货叉套尺寸Fork pocket size: 180x80mm
*货叉套中心Fork pocket centre: 875mm
*净重Unit weight: 320kg

SWL Per Position每个点承载				
位置Position	1	2	3	4
伸缩长度Extension(mm)	930	1245	1625	2005
承载SWL(kg)	7500	3600	2700	2250

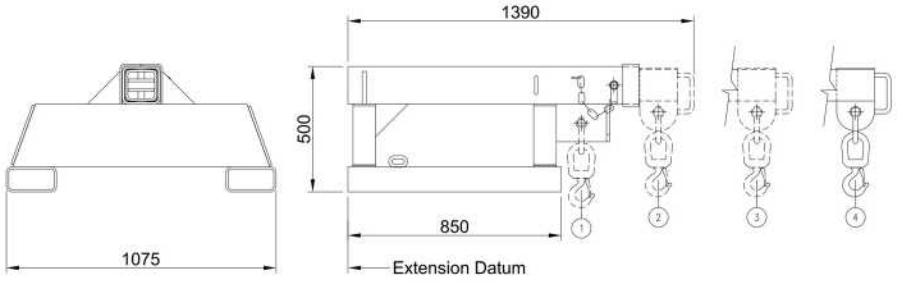




Type FJL75 Fixed Jib Long-7.5T
长起吊臂

The FJL5 has a 3.56m reach when fully extended. Overall length when closed is 2.19m. Painted or galvanized finished.

该款长起吊臂伸缩范围从0.92m-3.5m，应用范围广，表面镀锌或喷漆。

*最大承载SWL(max): 7500kg
*货叉套尺寸Fork pocket size: 180x80mm
*货叉套中心Fork pocket centre: 875mm
*净重Unit weight: 450kg

SWL Per Position每个点承载								
位置Position	1	2	3	4	5	6	7	8
伸缩长度Extension(mm)	920	1380	1805	2045	2425	2805	3185	3565
承载SWL(kg)	7500	6410	5700	4950	3750	1950	1140	720

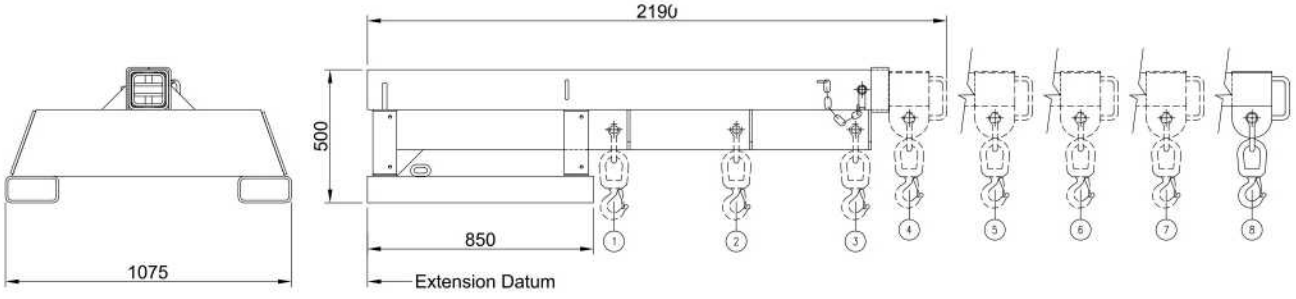

Type SFJS10 Fixed Jib Short-10T
短起吊臂




The SFJS10 is the largest capacity jib in the range. Fitted with wide pocket centres, also suited for fork-lifts fitted with special hydraulic tine positioners. Overall length when retracted is 1.39m. Painted or galvanized finished.

该10T短起吊臂适用于大吨位叉车上，是系列吊臂中承载最大的一个，伸缩长度1.39-2m,配有安全链条，表面喷漆或镀锌。

*最大承载SWL(max): 10000kg
*货叉套尺寸Fork pocket size: 230x110mm
*货叉套中心Fork pocket centre: 875mm
*净重Unit weight: 400kg

SWL Per Position每个点承载				
位置Position	1	2	3	4
伸缩长度Extension(mm)	930	1245	1625	2005
承载SWL(kg)	10000	4800	3600	3000

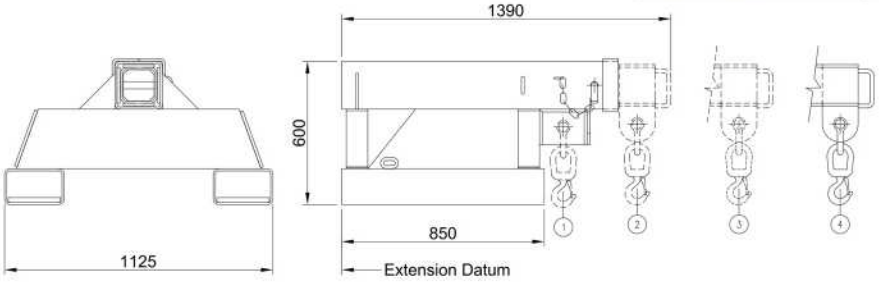




Type FJL10 Fixed Jib Long-10T
长起吊臂

The FJL5 has a 3.56m reach when fully extended. Overall length when closed is 2.19m. Painted or galvanized finished.

该款长起吊臂伸缩范围从0.92m-3.5m，最大可承载10T重物，表面镀锌或喷漆。

*最大承载SWL(max): 10000kg
*货叉套尺寸Fork pocket size: 230x110mm
*货叉套中心Fork pocket centre: 875mm
*净重Unit weight: 515kg

SWL Per Position每个点承载								
位置Position	1	2	3	4	5	6	7	8
伸缩长度Extension(mm)	920	1380	1805	2045	2425	2805	3185	3565
承载SWL(kg)	10,000	8550	7600	6600	5000	2600	1520	960

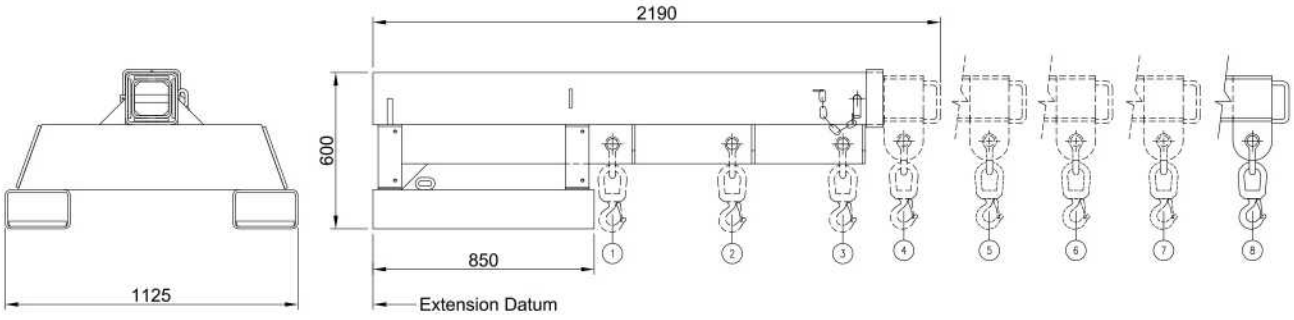

Type TJS2.5 Tilt Jib Short-2.5T
倾斜短起吊臂




The TJS2.5 tilting jib allows for additional height, compensating for length of the hook and silings when lifting. The boom can be set at 3 angled positions as well as level. Jib also offers 5 different hook positions, with a 2m maximum reach. Painted or galvanized finished.

该倾斜短起吊臂可以调节吊臂倾斜度（3个倾斜挡位）以弥补伸缩臂长度，还配有5个伸缩挡位，运用灵活，表面喷漆或镀锌。

SWL Per Position每个点承载					
位置Position	1	2	3	4	5
伸缩长度 Extension(mm)	825	1125	1260	1640	2020
承载SWL(kg)	2500	1800	1200	900	750

*最大承载SWL(max): 2500kg
*货叉套尺寸Fork pocket size: 185x65mm
*货叉套中心Fork pocket centre: 337mm
*净重Unit weight: 130kg

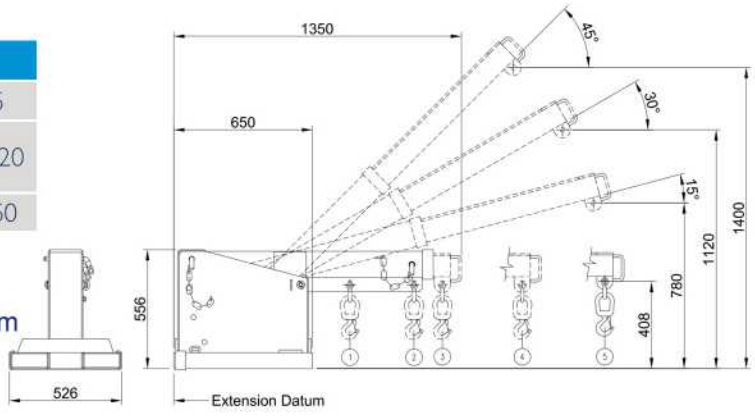




Type TJL2.5 Tilt Jib Long-2.5T
倾斜长起吊臂

With a maximum reach of 3.58m and an additional height of 2.4m when fully extended, the jib is extremely versatile, 8 hook positions available, as well as 3 different angle positions. Painted or galvanized finished.

该款长起吊臂最长可伸3.58m，另外有2.4米的额外高度，该起吊臂非常灵活，配有8个伸缩位置以及3个倾斜位置，表面镀锌或喷漆。

SWL Per Position每个点承载								
位置Position	1	2	3	4	5	6	7	8
伸缩长度 Extension(mm)	1005	1465	1925	2060	2440	2820	3200	3580
承载SWL(kg)	2500	2500	1900	1650	1250	650	380	240

*最大承载SWL(max): 10000kg
*货叉套尺寸Fork pocket size: 230x110mn
*货叉套中心Fork pocket centre: 875mm
*净重Unit weight: 515kg

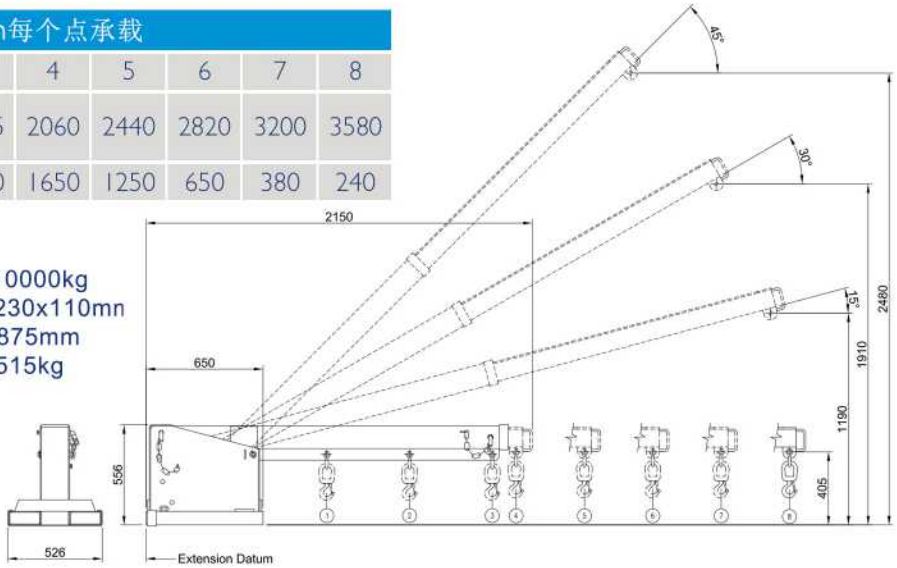


Type TJCL4.5 Tilt Jib Long-4.5T
倾斜长起吊臂



The TJCL4.5 tilting jib is one of the most versatile forklift jib attachments in the range, allowing extra height to 2.23m, with a 3.53m reach when fully extended. This slip-on attachment is held to the forklift by a safety chain. The overall jib length when closed is 2.1m. Painted or galvanized finished.

该倾斜长起吊臂是产品系列中其中一款最为灵活的起吊臂，当伸长到最长3.52m的时候，可额外升高2.23m，配有6个伸缩节点及2个倾斜挡位，表面喷漆或镀锌。

*最大承载SWL(max): 4500kg
*货叉套尺寸Fork pocket size: 185x65mm
*货叉套中心Fork pocket centre: 322mm
*净重Unit weight: 190kg

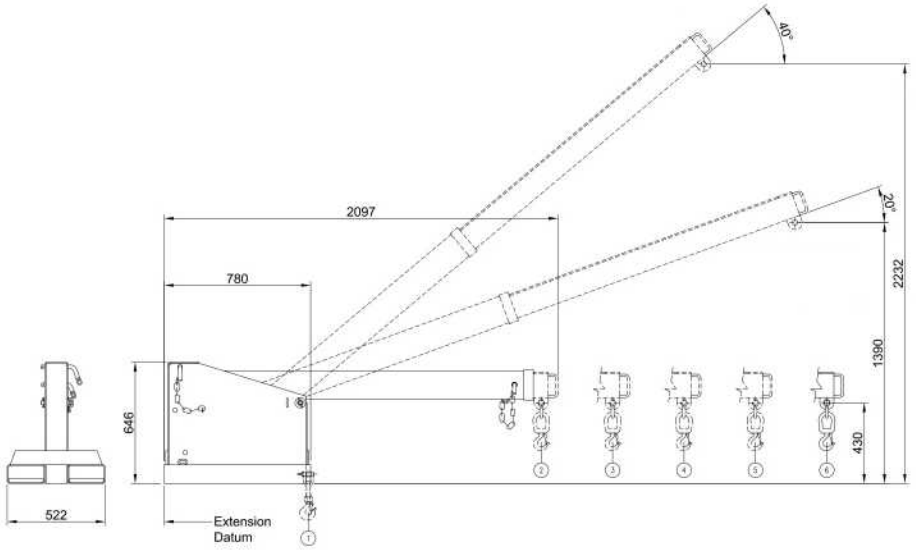

SWL Per Position每个点承载						
位置Position	1	2	3	4	5	6
伸缩长度Extension(mm)	770	2010	2390	2770	3150	3530
承载SWL(kg)	4500	1100	630	470	300	150


Level position


Tilted position

Type TJS5 Tilt Jib Short-5T
倾斜短起吊臂




The TJS5 tilting jib can be set at 3 angled positions as well as level. Jib also offers 5 different hook positions, with a 2m maximum reach. Painted or galvanized finished.

该倾斜短起吊臂配有5个伸缩节点及3个倾斜挡位，最长可延伸2m，表面喷漆或镀锌。

*最大承载SWL(max): 4750kg
*货叉套尺寸Fork pocket size: 185x75mm
*货叉套中心Fork pocket centre: 370mm
*净重Unit weight: 180kg

SWL Position每个点承载					
位置Position	1	2	3	4	5
伸缩长度 Extension(mm)	820	1120	1270	1650	2030
承载SWL(kg)	4750	3600	2400	1800	1500

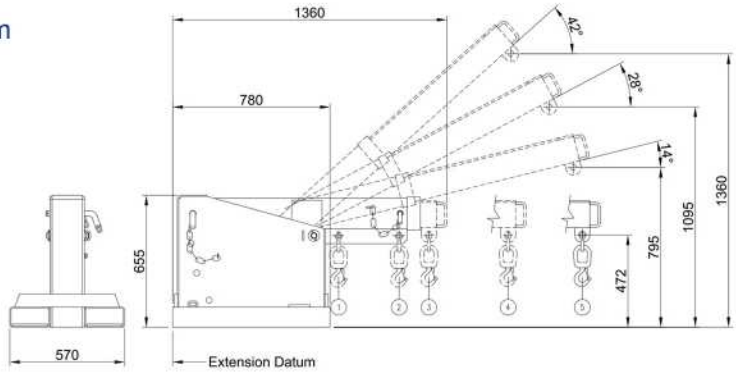

Type TJSL Tilt Jib Long-5T
倾斜长起吊臂




With a maximum reach of 3.6m and an additional height of 2.4m when fully extended, the TJL5 is extremely versatile, 8 hook positions available, as well as 3 different angle positions.Painted or galvanized finished.

该倾斜长起吊臂配有8个挂钩节点及3个倾斜挡位，最长可延伸3.6m，表面喷漆或镀锌。

SWL Position每个点承载								
位置Position	1	2	3	4	5	6	7	8
伸缩长度 Extension(mm)	1000	1460	1920	2070	2450	2830	3210	3590
承载SWL(kg)	4750	4275	3800	3300	2500	1300	760	480

*最大承载SWL(max): 4750kg
*货叉套尺寸Fork pocket size: 185x75mm
*货叉套中心Fork pocket centre: 370mm
*净重Unit weight: 240kg

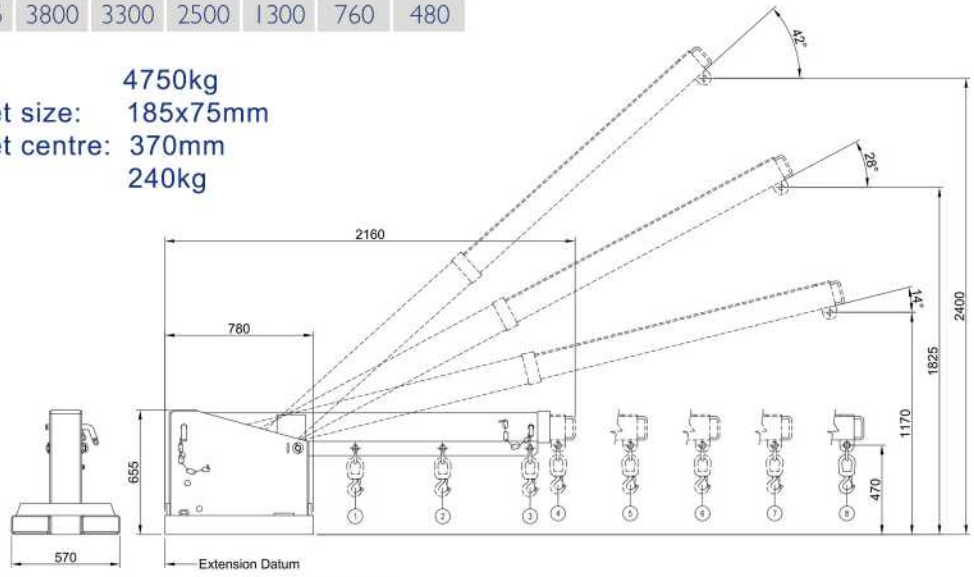

Wide Fork Pocket 'S' Series Jib
宽口 "S" 系列起吊臂

These jibs are fitted with the fork pocket centres set at a wider measurement than the standard range. Whilst they can be used on standard forklifts, these jibs are manufactured to suit forklifts which can not position the fork tines for the standard range of jibs, such as forklifts fitted with special hydraulic fork positioners. The wide pocket option is available on all 2.5T and 5T jibs.Painted or galvanized finished.

Note: All 7.5 tonne and 10 tonne jibs are manufactured with wide pockets as standard.


Type SFJS

宽口系列起吊臂相比普通标准起吊臂，拥有更宽的货叉套距离，所有2.5T和5T的起吊臂都可以做成该款式。表面喷漆或镀锌。


Type STJL


Type SFJL

Type型号	Pocke size叉套尺寸(mm)	Pocket Centres叉套中心(mm)	Overall Width总长(mm)	Weight净重(kg)
SFJS 2.5	185 x 65	740	930	125
SFJL 2.5	185 x 65	740	930	155
SFJS 5	185 x 75	875	1075	160
SFJL 5	185 x 75	875	1075	200
STJS 2.5	185 x 65	740	930	160
STJL 2.5	185 x 65	740	930	205
STJS 5	185 x 75	875	1075	210
STJL 5	185 x 75	875	1075	270

The information outlined in the above table is for the "S" wide pocket version of the standard range of 2.5 tonne and 5 tonne jibs. Only the pocket spacing, overall width and weight varies from the standard attachment. Please refer to standard model specifications for Safe Working Load (SWL) information.


Type SJ2 Jib
简易套入式吊臂


Simple slip-on jib attachment, suitable for most forklifts. Two lifting points available, and supplied with one safety swivel hook. Painted or galvanized finished.

该套入式简易吊臂适用于大部分叉车，配有2个吊钩，配有安全链条，表面喷漆或镀锌。



*最大承载SWL(max): 2000kg
*货叉套尺寸Fork pocket size: 165x65mm
*货叉套中心Fork pocket centre: 275mm
*净重Unit weight: 45kg

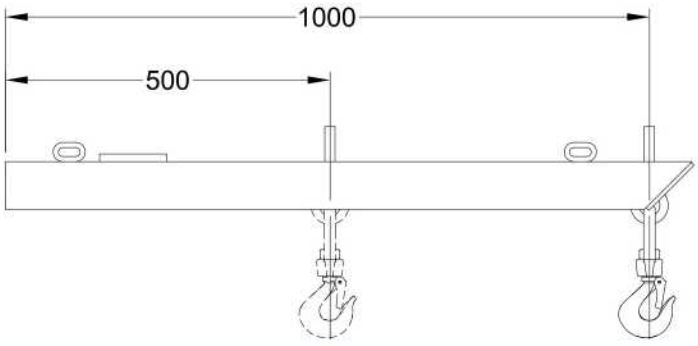

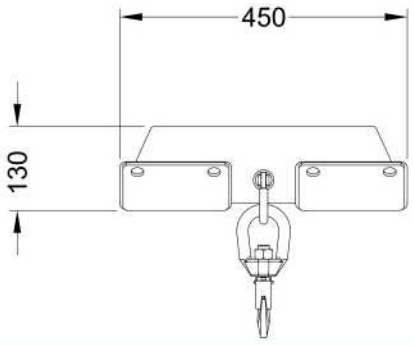



Type SJW Wide Pocket Jib
宽起吊臂

The SJW style jib is fitted with wide spaced fork pockets, and provides 2 lifting positions 550mm apart. This is a simple slip-on style jib, and is supplied with safety swivel hook. Painted or galvanized finished.

该起吊臂拥有一个更宽的设计，配有2个吊钩节点，两个节点相距550mm，配有安全挂钩，表面喷漆或镀锌。



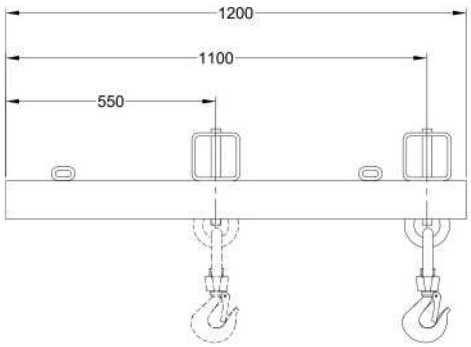

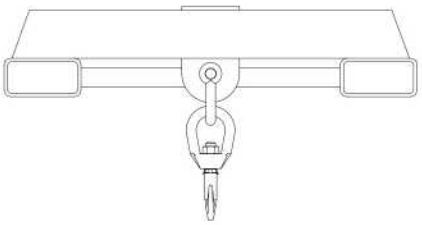


Type 型号	SWL(kg)/550mm 承载/550mm	SWL(kg)/1100mm 承载/1100mm	Fork Pocket Size 货叉套尺寸(mm)	Fork Pocket Centres 货叉套中心(mm)	Unit weight(kg) 净重
SJW 2.5	2500	1500	165 x 65	740	75
SJW 4.5	4500	3000	180 x 80	875	140
SJW 7	7000	5000	180 x 80	875	210
SJW 11	11,000	8000	230 x 110	875	260


Type SBJ6 Battery Removal Jib
电池搬运吊臂

This jib is used for the removal and placement of battery packs into electric operated forklifts. Supplied with multiple lifting points and supplied with 4 slings, this unit can be used for both 2 point and 4 point lift battery packs. Galvanized finished.

该吊臂是为移除和替换电动叉车的电池而专门设计的一款产品，配有2个吊钩和4个吊钩不同款式，配有安全链条，表面镀锌。

*最大承载SWL(max): 2000kg
*载荷中心Load centre: 654mm
*货叉套尺寸Fork pocket size: 165x65mm
*货叉套中心Fork pocket centre: 255mm
*净重Unit weight: 64kg
*吊钩中心Hook centre: 510x916mm

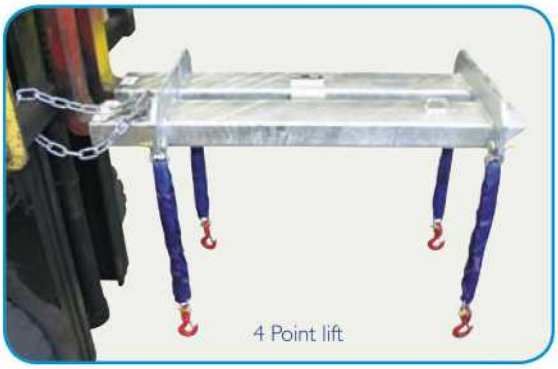
4 Point lift

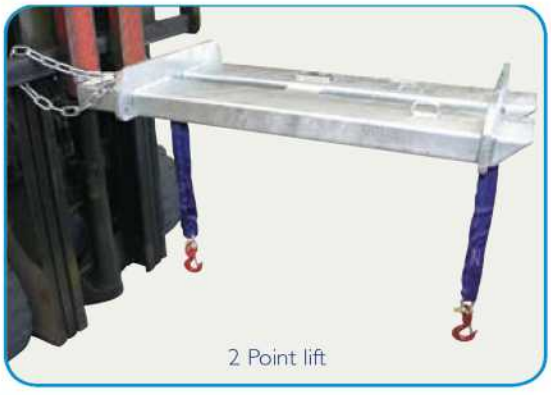
2 Point lift

Type GNJ Carriage Mounted Jib
挂装式起吊臂

The GNJ carriage mounted jib is a heavy duty carriage mounted jib that offers height and manoeuvrability. This jib mounts to a standard forklift carriage and comes with an optional support stand upon request. Enamel paint finish.

该挂装式起吊臂适用于楼板、玻璃、涵管等产品的起吊搬运，可根据客户定制，配有放置架。表面喷漆。




Optional Stand

Type 型号	Mounting Class 安装等级	SWL(kg)/600mm 承载/600mm	SWL(kg)/900mm 承载/900mm	SWL(kg)/1200mm 承载/1200mm	Unit weight(kg) 净重
GNJ 2.5	Class 2	2500	2000	1500	130
GNJ 4.5	Class 3	4500	3500	2500	150
GNJ 6	Class 4	6000	5000	4000	170


Type CLC1500 Crane Hook
起吊钩

Type CLC1500 crane hook is the type Mounted on single fork with self-fastened function. It supplied with swivel safety hook and alloy shackle.
Surface treatment: galvanized finish

该起吊钩应用于单叉刀上，并带有自紧功能，配有安全旋转吊钩和合金卸扣。表面镀锌。




* Safe working load/安全载荷: 1500kg
* Unit weight/重量: 24kg
* A: 575mm
* B: 180mm
* C: 80mm

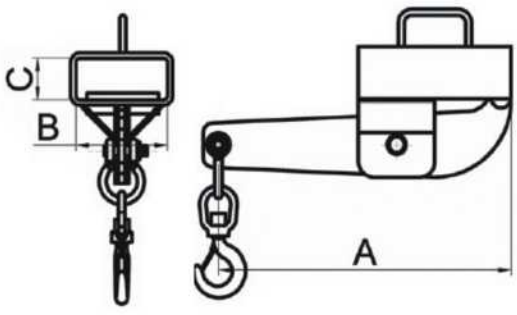

Type CLC3000 Crane Hook
起吊钩

The CLC3000 crane hook is the type that mounted on dual forks with self-fastened function and extendable intine. Supplied with swivel safety hook and alloy shackle. Galvanized or painted finish.



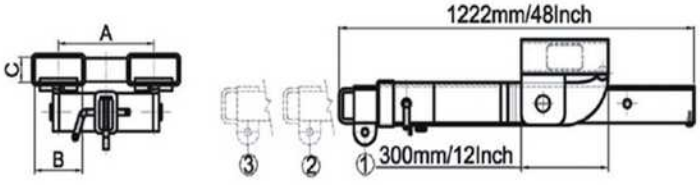

CLC3000起吊钩应用于双叉刀上，并带有自紧功能，内壁可延伸;配有安全旋转吊钩和合金卸扣，表面喷漆或镀锌。


Type型号	A(mm)	B(mm)	C(mm)	Weight重量(kg)
CLC300	360	180	80	77

Position位置	Extension延伸长度(mm)	Capacity承载(kg)
①	840	3000
②	1200	2200
③	1600	1500

Type SDL Drum Lifter
抱桶器

Designed for standard 205L drums, the fully automatic clamping action enables safe and precise placement of drums without the operator having to leave the seat. The drum is gripped by pushing the arms against the drum centre and driving forward with the forklift. The arms will engage around the drum and lock under the rolling hoop when raised.


SDL 1

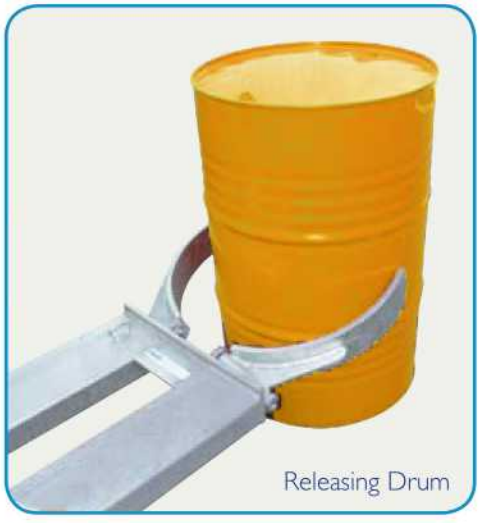
Releasing Drum

To release, lower the drum onto ground and continue to lower the forks whilst reversing the forklift. The SDL2 will handle either a single drum or double drums.
painted or galvanized finished.

该产品使用简单、方便，并且非常安全，整个操作过程中，叉车司机无需离开座位操作；该产品针对205L标准铁桶进行设计；可运用于叉车或者堆高车上，有单桶、双桶可供选择；表面处理喷漆或镀锌。

Type 型号	Drum No. 夹桶数量	SWL 承载(kg)	Fork Pocket Centres 叉套中心(mm)	Fork Pocket Size 货叉套尺寸(mm)	Load Centre 承载中心(mm)	Unit weight 净重(kg)
SDL 1	1	500	325	165 x 65	1340	62
SDL 2	2	1000	585	165 x 65	1340	75




SDL 2



Type BGN Drum Lifter
鹰嘴钩举桶器

Drum handling made easy. A good field of vision allows the operator to continually observe the drums being handled. The unique beak design provides a high clamping force, even when travelling over uneven ground.
Suitable for standard 205L steel and plastic drums, and available as a single or a double drum unit. A contoured rest acts at apoint low enough down the drum to prevent damage to the drum and its labelling. Painted or galvanized finished.


BGN 1

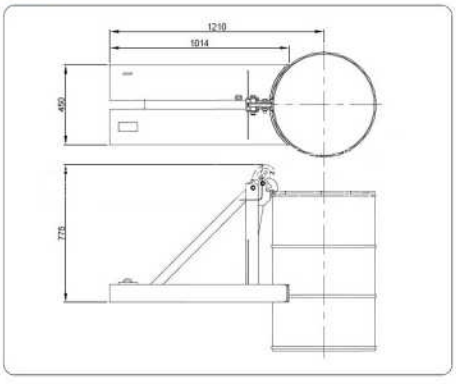

该产品配合叉车使用可安全高效地搬运和堆放油桶，节省仓储空间；整个操作过程中，叉车司机无需离开座位操作；该产品针对205L标准铁桶进行设计，特殊结构使其具有很大的夹紧力；有单桶、双桶可供选择；表面处理喷漆或镀锌。

Type 型号	Drum No. 夹桶数量	SWL 承载(kg)	Fork Pocket Centre 叉套中心(mm)	Fork Pocket Size 货叉套尺寸(mm)	Load Centre 承载中心(mm)	Unit weight 净重(kg)
BGN 1	1	1000	250	185 x 60	1210	72
BGN 2	2	1500	600	185 x 60	1250	95


Beak Grab



Contoured Drum Rest


BGN 1


BGN 2

Type DR400MF Drum Rotator
旋转抱桶器

Designed for lifting and rotating 200L standard drums in 360 degree. The drum is held with a single hinged steel gate with a grip pad and ratchet. Simply ddrive up to the drum and close the gate around it, securing it by locking the latch. Dual gate structure, easy installation, simple operation, convenient and safe. It used by forklift or stacker. painted or galvanized finished.

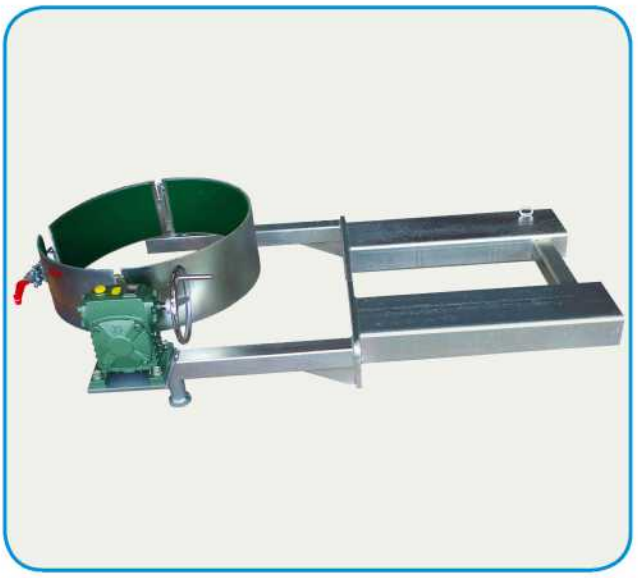

该产品采用双门式结构，方便安装、使用方便且非常安全；可搬运200L标准桶及完成360° 倾翻工作；运用于叉车或者堆高车上；表面喷漆或镀锌。

Type 型号	Drum No. 夹桶数量	SWL 承载(kg)	Fork Pocket Centres 叉套中心(mm)	Fork Pocket Size 货叉套尺寸(mm)	Load Centre 承载中心(mm)	Unit weight 净重(kg)
DR400	1	400	500	180x65	1590	112

Type 3D-BTQ-T01 Drum Lifter
抱桶器/桶搬运器

This is a simple slip-on attachment for handling a wide range of plastic and steel drums. The support foot and load binder enable this to be carried safely. This attachment allows you to pick up any drum and does not have a lop or rim at the top like many other forklift drum lifters. This has been specially designed for the transportation of harsh chemical over and terrain. Painted or galvanized finished.



这是一款简易的叉车属具，可用于搬运各种类型的塑料桶、铁桶。该产品在使用过程中不会像其他举桶器一样对桶产生刮痕；这是一款专门为搬运腐蚀性化学原料而设计的。运用于叉车上；表面喷漆或镀锌。

Type 型号	Drum No. 夹桶数量	SWL 承载(kg)	Fork Pocket Centres 叉套中心(mm)	Fork Pocket Size 货叉套尺寸(mm)	Load Centre 承载中心(mm)	Unit weight 净重(kg)
3D-BTQ	1	500	320	135x60	1300	70

Type NWB-T Wheelie Bin Tipper
翻箱器

Suitable for emptying 1 or 2 standard 240L plastic bin. The bin is wheeled into the cradle and secured by the safety chains. The 180° tipping operation is simple and safe with the operator never having to leave the seat during the tipping cycle. Painted or galvanized finished.




NWB-T2


NWB-T1 Tipped

NWB-T翻箱器是对翻转卸空1个或者2个240L标准垃圾桶而设计的，把箱子推到支架上，将链条连接到货叉架上方，操作者可在工作场所提升箱子进行翻转卸空，无需离开座位。

Type 型号	Bin No. 箱数	SWL 承载(kg)	Fork Pocket Size 叉套中心(mm)	Fork Pocket Centre 货叉套尺寸(mm)	Load Centre 承载中心(mm)	Unit weight 净重(kg)
NWB-T1	1 x 240 litre	500	165 x 65	340	1200	100
NWB-T2	2 x 240 litre	1000	165 x 65	340	1200	150

Type WB Wheelie Bin Tipper
翻箱器


WB-240


WB-660

With 2 models available, one for 240L and another for 660L wheelie bins, the WB style tipper is operated from the forklift drivers seat by pull-cord. The bin is secured in the wheelie bin cradle with safety chains.


WB翻箱器针对240L和660L标准桶进行旋转卸空，操作员无需离开座位拉动拉绳实现旋转卸空，操作简单安全。

Type 型号	Bin No. 箱数	SWL 承载(kg)	Fork Pocket Size 叉套中心(mm)	Fork Pocket Centre 货叉套尺寸(mm)	Load Centre 承载中心(mm)	Unit weight 净重(kg)
WB-240	1 x 240 litre	500	165 x 65	815	1000	100
WB-660	1 x 660 litre	500	165 x 65	485	1700	140

Type TS Tipping Containers/Bins
自卸倾翻斗

Tipping containers are the industry's best tool for waste sorting and material handling.
Designed, reinforced and powder coated to provide maximum safety and service life.
Spring pressure plate on the base frame for automatic emptying.Also with manual tipping.
Tipping containers are expectionally suited to waste sorting, they can be supplied in colors as recommended by the public waste collection service.



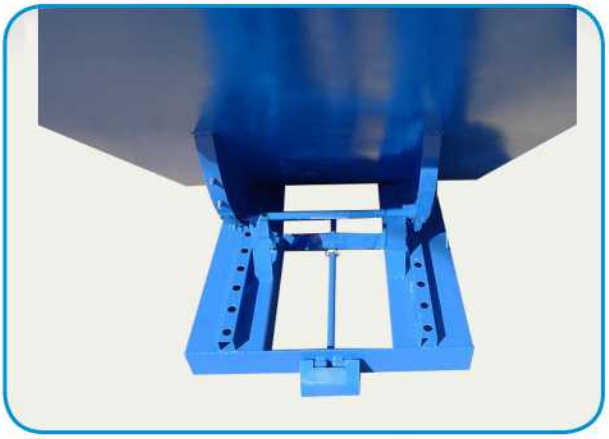

该自卸倾翻斗用途广泛，操作简单，安全实用，是工业生产中收集车床、切割机、锯床等废料的理想工具。


特殊的结构能够实现实现斗的自动倾卸功能，叉车司机无需离开座位操作，确保了司机的人身安全。也可通过拉动链条，实现人工倾卸废料。

可选配橡胶轮或铸铁轮， 表面喷漆或镀锌。



截面示意图

Frame Dimensions:

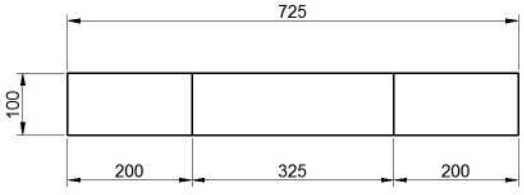

Type 型号	Capacity 容积(cu. m)	Dimensions(mm) 外形尺寸)	SWL(kg) 载荷	Weight(kg) 重量
TS-15	0.15	815x760x580	1200	80
TS-30	0.30	1235x840x750	1500	115
TS-60	0.60	1525x865x870	2000	145
TS-90	0.90	1525x1215x870	2000	155
TS-110	1.10	1700x1215x1045	2000	195
TS-160	1.60	2073x1066x1248	2000	235
TS-200	2.00	2073x1316x1248	2000	280
TS-250	2.50	2073x1566x1248	2000	300
TS-300	3.00	2073x1866x1248	2000	331

Type D-series Self-dumping Hoppers
自卸倾翻斗


Hopper automatically dumps when bumper release contacts the side of the dumpster.
Hopper returns to an upright and locked position automatically after it dumps.
Also includes a cable that may be operated from the seat of the fork truck to manually dump the hopper.
A safety restraint is provided to secure the hopper to the fork truck.
Foot wheel optional.
This mode has “D-xx-LD” light duty series, “D-xx-MD” mediumd duty series and “D-xx-HD” heavy duty series for your choise.



该自卸倾翻斗用途广泛，操作简单，安全实用，是工业生产中收集车床、切割机、锯床等废料的理想工具。


特殊的结构能够实现实现斗的自动倾卸功能，叉车司机无需离开座位操作，确保了司机的人身安全。也可通过拉动链条，实现人工倾卸废料。

分轻型斗，中型斗和重型斗供客户选择。可选配橡胶轮或铸铁轮， 表面喷漆或锌。

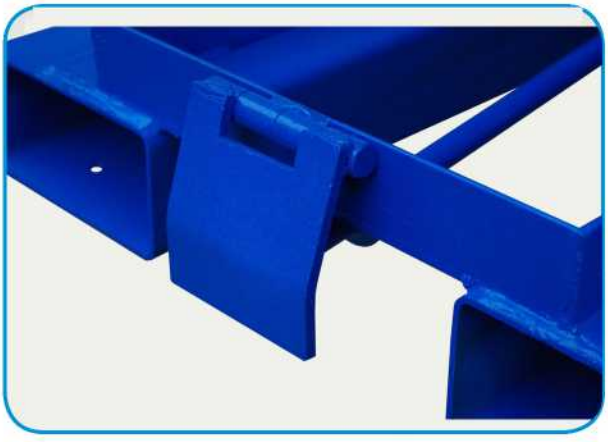

截面示意图

Frame Dimensions:

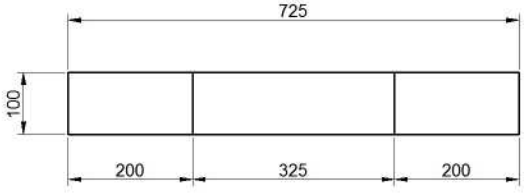



Type 型号	Capacity 容积(cu. m)	Dimensions(mm) 外形尺寸)	SWL(kg) 载荷	Weight(kg) 重量
D-19-LD	0.19	660x1320x960	909	155
D-25-LD	0.25	660x1320x960	909	155
D-38-LD	0.38	860x1310x960	909	165
D-57-LD	0.57	860x1550x1080	909	204
D-76-LD	0.76	1060x1550x1080	909	217
D-115-LD	1.15	1110x1740x1320	909	257
D-153-LD	1.53	1440x1740x1300	909	278
D-191-LD	1.91	1770x1740x1320	909	392
D-229-LD	2.29	2080x1740x1300	909	427


Type CFS Tipping Bin
倾翻斗

The light weight and cost effective type CFS6 fork skip bin has been manufactured from 2mm plate and is suitable for goods or waste transport and storage. Fitted with a forklift carriage and safety chain, two front wheels, a rear swivel wheel and push handle. these bins are designed for manual push over, galvanized finished.



*最大承载SWL(max): 350kg
*货叉套尺寸Fork pocket size: 140x65mm
*货叉套中心Fork pocket centre: 367mm

CFS倾翻斗是一款轻量化设计的产品，使用的是2mm板，适用于转运或储存货物或者废料。配有安全链条、2个前轮、1个活动轮、1个手推柄，倾翻方式是手动倾翻。表面镀锌处理。

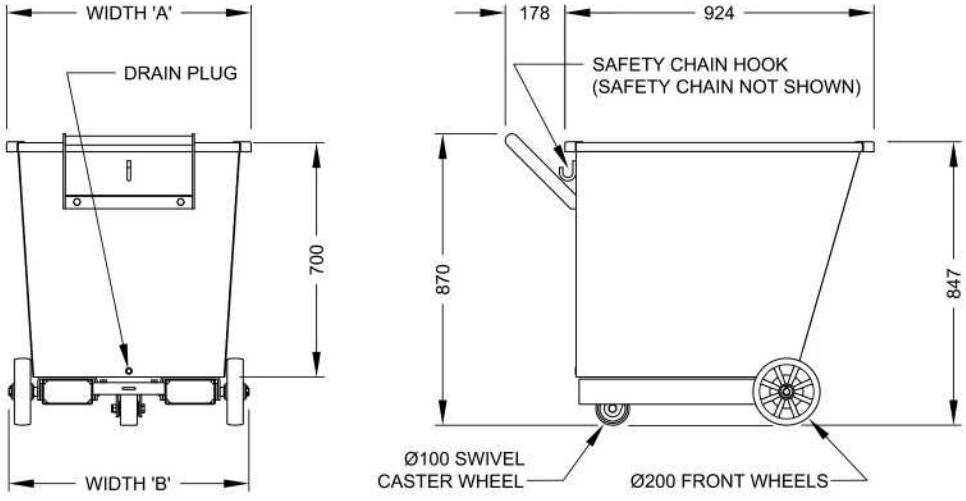

Type 型号	Capacity（m³） 容积	SWL(kg) 承载	L (mm) 长	H(mm) 高	W(mm) 斗宽	Overall W(mm) 总宽	Unit Weight(kg) 净重
CFS 6	0.35	350	1120	860	580	730	65
CFS 9	0.65	350	1120	860	900	1050	90





Type CSD Tipping Bin
倾翻斗


The economical CSD bin is a self dumping bin suitable for most waste handling applications. This bin is supplied with 4 crane lugs and upending lugs under.
It is also fitted with a drain plug and wheel brackets(wheels not supplied unless ordered). Being a nesting bin, it uses a minimum of space for storage and transport. Painted or galvanized finished.

*最大承载SWL(max): 1500kg
*配吊环 Crane lugs fitted standard
*配漏水塞 Drain plug fitted standard


CSD 12

CSD倾翻斗是一款能够自我倾翻的废料斗，更多用在废料处理行业。配有4个吊环可与吊车、行车配套使用，底部可选装脚轮，表面镀锌或喷漆。

Type 型号	Capacity（m³） 容积	W(mm) 宽	L (mm) 长	H(mm) 高	Fork pocket size 货叉套尺寸(mm)	Fork pocket centre 货叉套中心(mm)	Unit Weight(kg) 净重
CSD 9	0.95	1010	1570	1010	185 x 75	380	180
CSD 12	1.25	1310	1570	1010	185 x 75	680	205

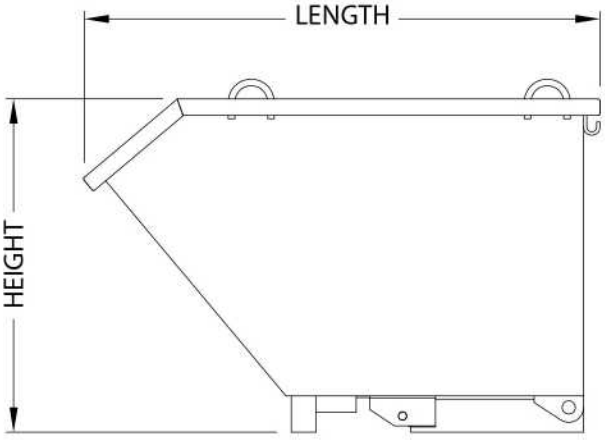




CSD 12 + Wheels


CSD 12 Stacked

Type ROB Rollover Bin
倾翻斗


The ROB bin has a smooth tipping action with minimal impact when emptying. The cut away front lip makes this style of bin ideal for tipping liquid product. To tip, the operator simply pulls the handle via a draw rope without leaving their seat. Painted or galvanized finished.
Crane lugs, wheels, drain calve are optional.


ROB 9

*最大承载SWL(max): 1000kg
*货叉套尺寸Fork pocket size: 165x65mm
*货叉套中心Fork pocket centre: 625mm

ROB倾翻斗是一款手拉式倾翻斗，司机无需离开座位操作，该产品更适合用于液体废料的操作。表面镀锌处理。

Type 型号	Capacity（m³） 容积	W(mm) 宽	L(mm) 长	H(mm) 高	Unit Weight(kg) 净重
ROB 9	0.90	1050	1500	1095	210
ROB 12	1.15	1350	1500	1095	225
ROB 15	1.40	1650	1500	1095	255
ROB 18	1.70	1950	1500	1095	280

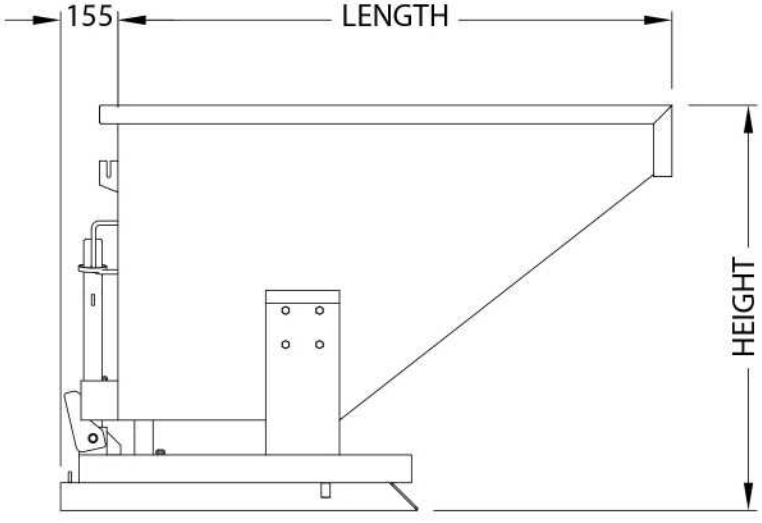


ROB 9 + Wheels




Type DBHS2 Dirt Bucket
液压铲斗

The DBHS2 hydraulic dirt bucket is a slip-on attachment allowing quick connection to the forklift with the use of 'quick connect' hydraulic couplings. The hydraulic operation allow for full backwards tilt making the buckets suitable for liquid products. This product is manufactured with a harden steel wear edge. Galvanized finished.


*Fork pocket size: 185x65mm
*Fork pocket centres: 750mm
*Safe working load: 1000kg


该铲斗可通过液压油缸进行前后倾翻，应用于装卸疏松货物如：沙子、煤炭、谷物、混泥土等；铲斗前端焊有一块耐磨材料加工的铲刀，增加了其使用寿命。
表面可喷漆或者镀锌处理。

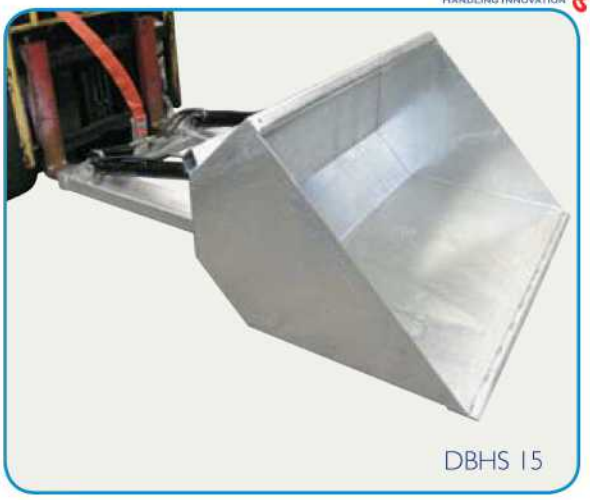
DBHS 15



Type 型号	容积 Capacity (m^3)	宽度 Width (mm)	净重 Weight (kg)	最大货叉尺寸 Pocket size (mm)	货叉中心 Pocket CTS (mm)	承载 SWL (kg)	HOR C of G (mm)	Vert C of G (mm)
DBHS2-12	0.50	1200	315	185x65	750	1000	1050	165
DBHS2-14	0.60	1400	335	185x65	750	1000	1070	160
DBHS2-16	0.65	1600	350	185x65	750	1000	1100	150
DBHS2-18	0.75	1800	390	185x65	750	1000	1120	140
DBHS2-20	0.85	2000	405	185x65	750	1000	1140	130

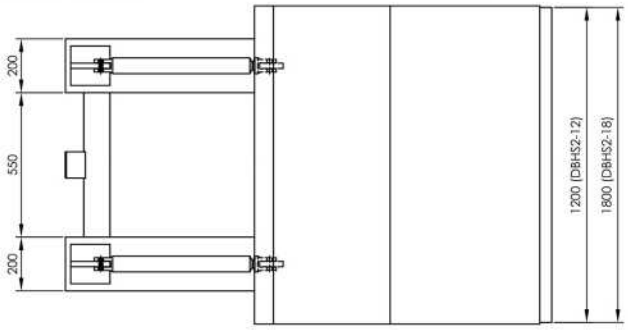

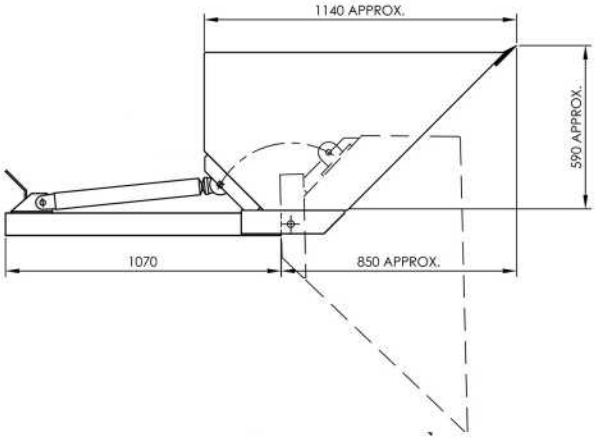


Type DB-H Hydraulic Bucket
液压铲斗

A slip-on hydraulically operated bucket which quickly connects to the forklift, requiring one aditional hydraulic function to operate.
The hydraulic operation allow for full backwards tilt making the buckets suitable for liquid products. This product is manufactured with a harden steel wear edge. Galvanized finished.



*Volume capacity: 0.22cbm
*Safe working load: 500kg
*Bucket width: 1200mm
*Fork pocket size: 165x65mm
*Fork pocket centres: 635mm
*Unit weight: 200kg



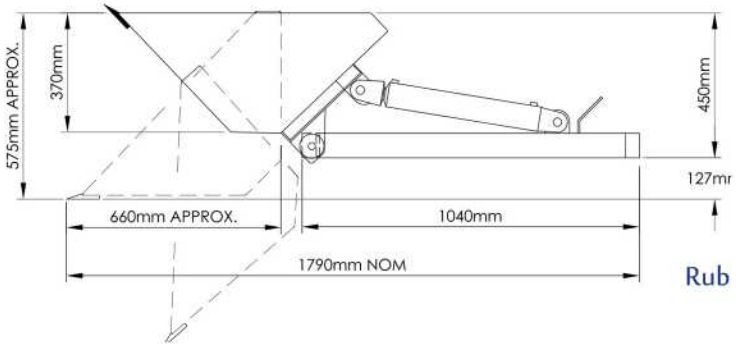


Rub


Type DB-M Manual Bucket
手拉倾卸铲斗

This manually operated slip-on dirt bucket connects quickly to the forklift without any hydraulic connection required. Dumping of products is via a simple mechanical lever operated from the driver's seat.




*Volume capacity: 0.22cbm
*Safe working load: 500kg
*Bucket width: 1200mm
*Fork pocket size: 165x65mm
*Fork pocket centres: 635mm
*Unit weight: 195kg

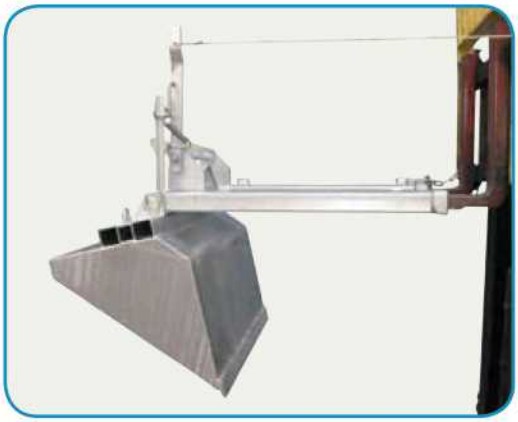

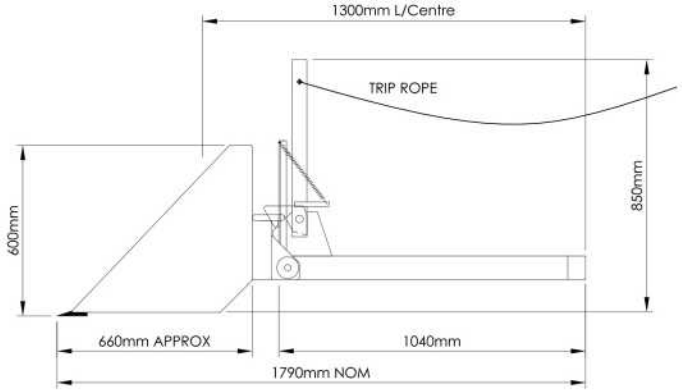


Type FE Fork Extension Slippers
货叉套

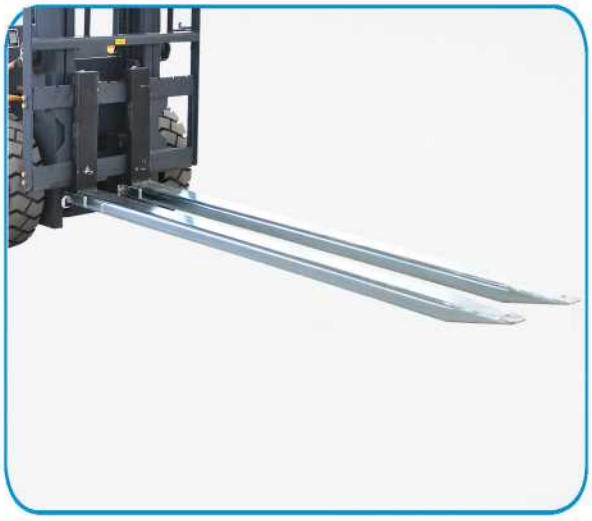

The FE fork slippers extend the versatility of the forklift truck. These slim profile slippers have been designed and manufactured in accordance with AS2359.15. Slippers used for general usage should be no longer than 167% of the supporting tine's length.

* Made from high tensile grade steel
* Supplied with toggle locking pins
* Galvanized or painted finish

货叉套采用高强度优质钢板，坚固耐用，适于操作体积较大或者较长的托盘；端部配有安全插销，确保使用过程中的稳定性和安全性。

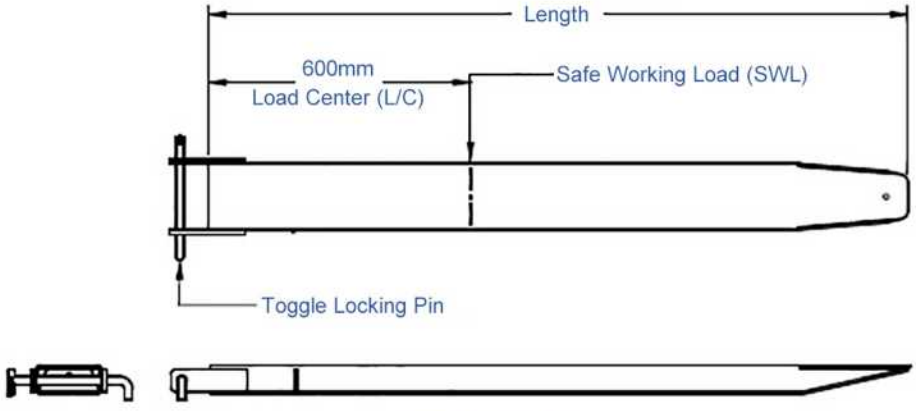

货叉套示意图

Type 型号	Length 长度(mm)	To suit Max Tin size 最大货叉尺寸(mm)	Weight/pair 每付重量(kg)	SWL@600mm 安全载荷
FE1-16	1600	100 x 45	50	3000
FE1-18	1800	100 x 45	56	3000
FE1-21	2100	100 x 45	66	3000
FE1-24	2400	100 x 45	75	3000
FE2-16	1600	130 x 50	60	4500
FE2-18	1800	130 x 50	66	4500
FE2-21	2100	130 x 50	78	4500
FE2-24	2400	130 x 50	88	4500
FE3-16	1600	155 x 55	91	6500
FE3-18	1800	155 x 55	102	6500
FE3-21	2100	155 x 55	119	6500
FE3-24	2400	155 x 55	136	6500
FE3-30	3000	155 x 55	170	6500
FE4-18	1800	160 x 65	133	8500
FE4-21	2100	160 x 65	155	8500
FE4-24	2400	160 x 65	177	8500
FE4-30	3000	160 x 65	221	8500

Type FEX Fork Extension Slippers
开口式货叉套



The FEX fork extension slippers provide you the extra support need to lift long or large objects. The loop style back keeps the fork firmly attached and installation requires no tools and completed in seconds.

* Made from high tensile grade steel
* Quick and simple way to lengthen your forks
* Steel retaining strap to keep extensions in place
* High lifting capacity
* Heavy duty steel construction

开口式货叉套采用高强度优质钢板，坚固耐用，适于操作体积较大或者较长的托盘；该结构无需配插销可直接钩住货叉套底端，使用简单方便。表面喷漆。

Type 型号	Max Fork Width 最大货叉宽度(inch)	Min.Fork Length 最小货叉长度(inch)	Ext. Length 使用长度(inch)	Weight/pair 重量/付(lb)
FEX112-48	4	1.25-2	48	49
FEX112-54	4	1.25-2	54	52
FEX112-60	4	1.25-2	60	55
FEX112-63	4	1.25-2	63	64
FEX112-72	4	1.25-2	72	73
FEX112-84	4	1.25-2	84	89
FEX112-90	4	1.25-2	90	96
FEX112-96	4	1.25-2	96	103
FEX140-48	5	1.5-2	48	71
FEX140-54	5	1.5-2	54	79
FEX140-60	5	1.5-2	60	89
FEX140-63	5	1.5-2	63	100
FEX140-72	5	1.5-2	72	115
FEX140-84	5	1.5-2	84	133
FEX140-90	5	1.5-2	90	145
FEX140-96	5	1.5-2	96	151
FEX165-48	6	1.75-2.5	48	87
FEX165-54	6	1.75-2.5	54	96
FEX165-60	6	1.75-2.5	60	109
FEX165-63	6	1.75-2.5	63	111
FEX165-72	6	1.75-2.5	72	132
FEX165-84	6	1.75-2.5	84	154
FEX165-90	6	1.75-2.5	90	169
FEX165-96	6	1.75-2.5	96	176

Type FA Fork Tines
货叉


The FA fork tines supplied by CF-ATTS have been designed and manufactured in a range of capacities and lengths. Always ensure that the tating of the fork tines is equal to or greater than the rated lift capacity of the fork truck.


Note: The fitting of fork tines with a lower rating than the fork truck could lead to failure, resulting in serious injury or death.



* Made from high tensile grade steel
* Light weight, slow wearing

货叉属具是相当于挂装在叉车上的机械手，使货叉成为一种多用途的物料搬运工具，能对几乎任何可以想象到的搬运对象进行叉、夹、推、拉、侧移和旋转等作业，从而提高物流效率，降低生产成本，避免产品破损，节省仓储空间。广泛应用于仓储、造纸、包装、印刷、烟草、家电、酒和饮料、毛棉纺织、港口码头，铁路、汽车制造、钢铁冶炼、化工和建筑等行业.

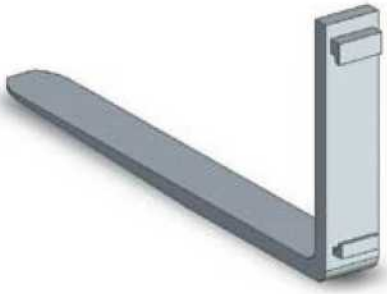

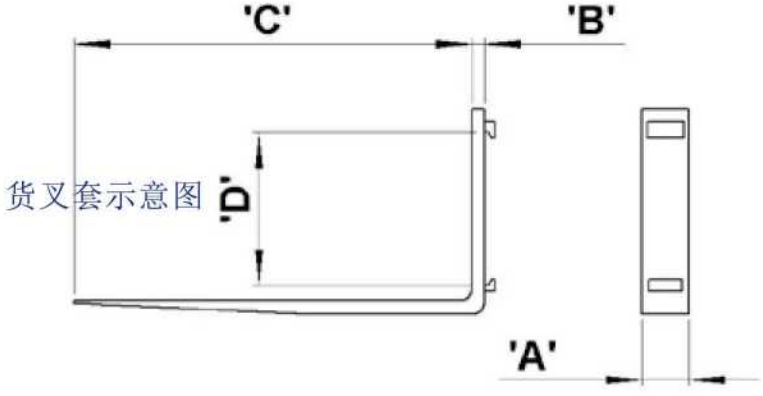

货叉套示意图

Type 型号	Capacity@500mm 载荷	"A"(mm) 宽	"B"(mm) 厚	"C"(mm) 长	Mounting class 安装等级	Weight/pair 每付重量
FA12-100	1200 kg	80	35	1000	Class 2 - 407 mm	64 kg
FA15-107	1500 kg	100	32	1070	Class 2 - 407 mm	72 kg
FA15-120	1500 kg	100	32	1200	Class 2 - 407 mm	83 kg
FA25-107	2500 kg	125	35	1070	Class 2 - 407 mm	96 kg
FA25-120	2500 kg	125	35	1200	Class 2 - 407 mm	107 kg
FA30-107	3000 kg	125	39	1070	Class 3 - 508 mm	112 kg
FA30-120	3000 kg	125	39	1200	Class 3 - 508 mm	130 kg
FA45-107	4500 kg	125	50	1070	Class 3 - 508 mm	154 kg
FA45-120	4500 kg	125	50	1200	Class 3 - 508 mm	166 kg

When fitting fork tines, ensure that the marking on the fork tine is compatible with the fork truck rating. Each fork tine is stamped on the side with the relevant information.The rating is for an individual fork tine and should be doubled to provide a total safe working load. Refer to the table above for ratings.

Forklift Scale CZHC25-A01
称重货叉



weighting fork is an innovative design fork, set high-precision dynamic measurement and reliable handling functions in one, in the lifting and handling process at the same time the weight of items measured. Can be adapted with the international standard fork at any type of forklift home and abroad.

Weighting fork as a high-precision dynamic measurement and handling equipment, can be widely in the following occasions: purchase control, prevention of overload, ingredients, waste management, picking and inventory management.


称重货叉是一种创新设计的货叉，集高精度动态计量与可靠的搬运功能于一体，能在举高和搬运过程中顺便就把物品的重量也称出来，省时又省钱。可适配带有国际标准货叉架的国内外任何型号的叉车。称重货叉作为一种高精度的动态计量与搬运设备，可广泛应用于以下场合：进货控制，预防过载，配料，废品管理，拣料和库存管理。

特征功能
*自动键盘标定，量程由软件自动调整，可设定不同的（kg/lb）称重单位
*开机同关机显示电池的电量数值，具有自动省电模式和自动关机功能，电源电压不足指示及电压过低自动关机功能
*抗干扰能力强，误操作不会丢失重要参数，程序能自动恢复。具有消除震动、晃动的滤波功能
*垂直状态提示称重功能，可设置称重物品重量高低位报警功能，内置设定物品称重数值报警功能
*具有零点自动跟踪，零位异常指示，超载报警等功能
*可进行货物件数计量、编码输入以及日期、时间标示
*可增加“蓝牙”配置功能或外控接口功能

参数Parameters:

1、承载能力Capacity:	2500Kg@500mm
2、称量范围Weighing range:	0.5 Kg ~ 2500Kg
3、称量精度Weighing accuracy:	≤1Kg□2500Kg□
4、准确度等级Accuracy class:	Ⅲ级
5、使用温度Using temperature:	0 ~ 40℃
6、通信接口Interface:	RS232
7、信号传输Signal transmission:	Wire transmission有线传输
8、安装等级Mounting class:	2A
9、货叉自重Weight:	148Kg
10、货叉尺寸Fork dimensions:	608x100x45mm


Type FCB Carriage Bar
型钢

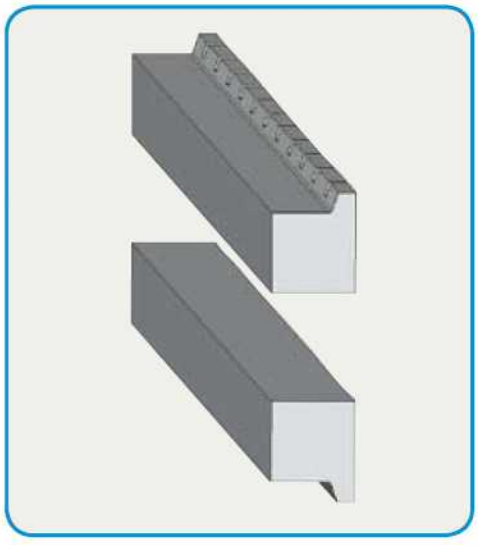

FCB carriage bar is supplied in pairs, consisting of one lower and one upper bar.


Manufactured from high tensile grade steel, ready for welding into standard carriages.


该类型型钢都是依照ISO2330标准进行设计和加工，每付型钢包含一根上型钢和一根下型钢，槽口尺寸根据ISO和FEM标准进行设计加工，材质为Q345B;所有型钢均可在标准货叉架上使用；可根据客户实际要求进行设计生产。

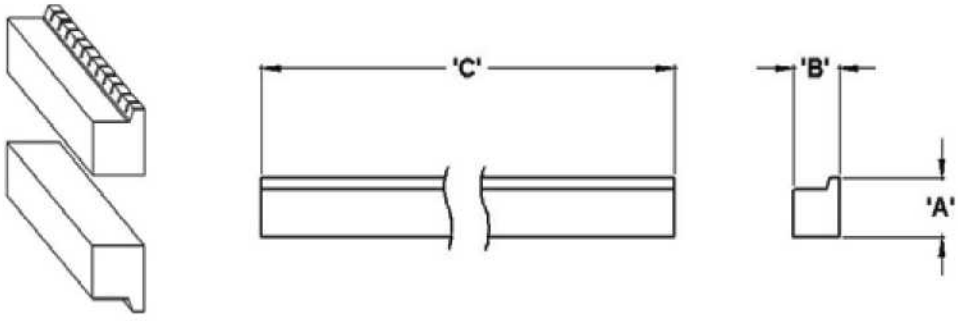



Upper and lower carriage bar have the same profile.
Cut out notches in upper bar only to suit fork tine locking.

Type 型号	ISO/FEM 等级	Class bar size尺寸(mm)			Weight /pair 每付重量(kg)
		A	B	C	
FCB2-102-P	Class 2	60	50	1020	41
FCB3-102-P	Class 3	70	50	1020	49
FCB4-160-P	Class 4	150	50	1600	188

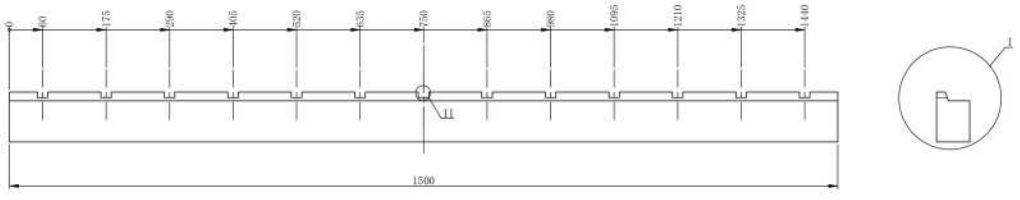





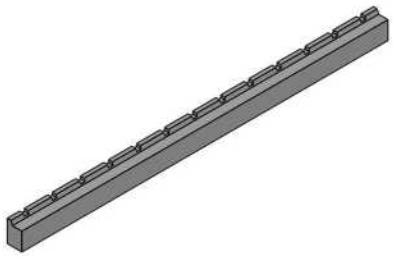

Type SS Sideshifter
侧移器

Sideshifter is the most common attachment installed in forklift, greatly improves the flexibility and moving efficiency of the forklift. It's suitable for various occassions using forklift for moving and stacking.

侧移器能够使叉车货叉上的货物实现左右向侧移，便于货物的叉取和堆垛，大大提高了叉车的灵活性和搬运效率，适用于叉车搬运和堆垛的各种工作场合。



Type 型号	Capacity@LC 承载能力(kg@mm)	W(mm) 宽度	Class 等级	ET(mm) 失载距	CGV(mm) 垂直重心	CGH(mm) 水平重心	Weight(kg) 自重	Pressure Rec. Max 压力
SS200800	2500@600	800	II	65	225	30	46	14Mpa/21Mpa
SS200850	2500@600	850	II	65	225	30	48.5	14Mpa/21Mpa
SS200900	2500@600	900	II	65	225	30	50.2	14Mpa/21Mpa
SS200920	2500@600	920	II	65	225	30	51	14Mpa/21Mpa
SS200940	2500@600	940	II	65	225	30	51.8	14Mpa/21Mpa
SS200980	2500@600	980	II	65	225	30	53.4	14Mpa/21Mpa
SS201000	2500@600	1000	II	65	225	30	54.2	14Mpa/21Mpa
SS201020	2500@600	1020	II	65	225	30	55	14Mpa/21Mpa
SS201040	2500@600	1040	II	65	225	30	55.8	14Mpa/21Mpa
SS201100	2500@600	1100	II	65	225	30	58.2	14Mpa/21Mpa
SS201150	2500@600	1150	II	65	225	30	60.2	14Mpa/21Mpa
SS201250	2500@600	1250	II	65	225	30	64.2	14Mpa/21Mpa
SS201400	2500@600	1400	II	65	225	30	70.2	14Mpa/21Mpa
SS301000	3500@600	1000	III	80	255	30	68	14Mpa/21Mpa
SS301020	3500@600	1020	III	80	255	30	69.1	14Mpa/21Mpa
SS301040	3500@600	1040	III	80	255	30	70	14Mpa/21Mpa
SS301100	3500@600	1100	III	80	255	30	71	14Mpa/21Mpa
SS301150	3500@600	1150	III	80	255	30	72.8	14Mpa/21Mpa
SS301200	3500@600	1200	III	80	255	30	74	14Mpa/21Mpa
SS301250	3500@600	1250	III	80	255	30	75.5	14Mpa/21Mpa
SS301300	3500@600	1300	III	80	255	30	77	14Mpa/21Mpa
SS301400	3500@600	1400	III	80	255	30	78.5	14Mpa/21Mpa
SS301525	3500@600	1525	III	80	255	30	89.3	14Mpa/21Mpa

Other size or type can be customized:




Type FS2.5 Fork Spreader
货叉架延伸器

The FS2.5 fork spreader is designed to safely lift extra wide or flexible loads without the risk of damage to products such as plasterboard, roof sheeting and timber. The fork spreader evenly distributes the load over its full length. This slip-on attachment is easily fitted onto the forklift and is secured by a safety chain. Painted or galvanized finished.



*最大承载SWL(max): 2500kg
*承载中心Load Centre: 600mm
*净重Unit weight: 225kg

*货叉套尺寸Fork pocket size: 160x60mm
*货叉套中心Fork pocket centre: 775mm

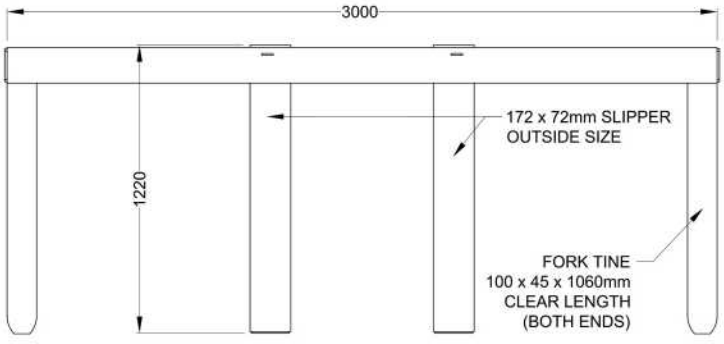


该货叉架延伸器大大增加了叉车的工作宽度，大大减小了货物侧翻的危险，可用来搬运宽度较宽的物品，如石膏板、瓦片板、木材等。货物的重力均匀分布在货叉套上，配有安全链条，不同尺寸，不同承载可根据客户具体需求定制。表面喷漆或镀锌。



Type FS3/LG Fork Spreader
货叉架延伸器

The FS3/LG is manufactured with a load guard, giving additional protection and capacity. This unit is more suited to where higher loads of loose products are being handled. Painted or galvanized finished.

*最大承载SWL(max): 3000kg
*货叉套尺寸Fork pocket size: 160x60mm
*货叉套中心Fork pocket centre: 775mm
*净重Unit weight: 260kg
*护栏高度Load guard height: 600mm
*承载中心Load centre: 600mm

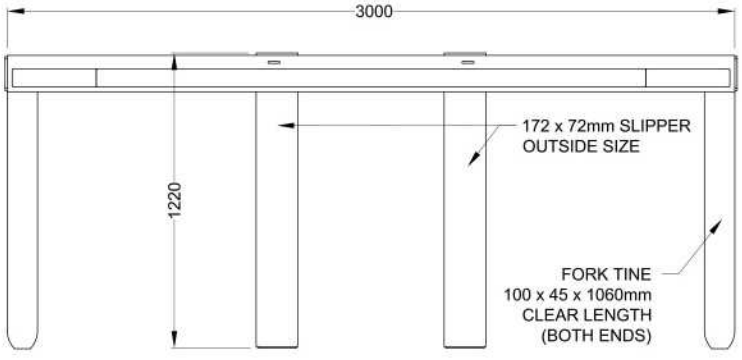

该款延伸器带有防护架，更多用来搬运疏松的物品，更加安全，可根据客户实际需求定制，表面镀锌或喷漆。

CUSTOM SIZE AND CAPACITY AVAILABLE ON REQUEST

Type RPC Carriage Mounted Roll Prong
挂装式串杆




The RPC carriage mounted roll prong is suitable for carpet, vinyl, fabric etc. Units are available for class 2, class 3 and class 4 forklift carriage, along with pin mounted. All "QR" model roll prongs are fitted with "quick release" mounting locks providing a safe and easy connection to the forklift carriage, saving time and eliminating the need for any tools. Prongs are made from high tensile steel. Galvanized or painted finish.

串杆用于搬运带有中心孔的货物，如地毯卷、钢带卷、盘钢卷等。该挂装式串杆带有插销，分2级、3级、4级安装。可快速安装拆卸，配有安全链条，表面镀锌或喷漆。



* Lost load for class 2/2级失载距: 100m'm
* Lost load for class 3/3级失载距: 225mm
* Lost load for class 4/4级失载距: 228mm

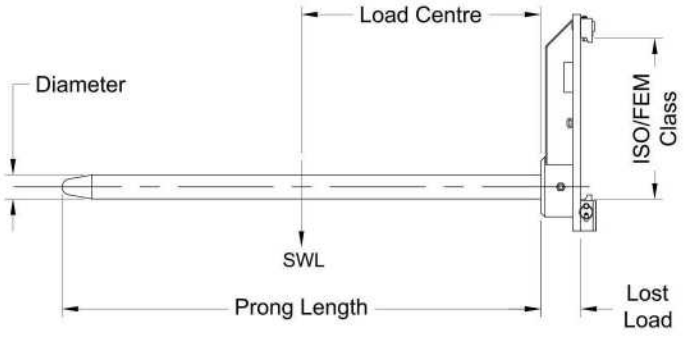

Type 型号	Mounting Class 安装等级	Prong Dia 直径(mm)	Prong Length 长度(mm)	SWL/Load Centre 承载/载荷中心	Weight 净重(kg)
RPC-QR2-40-1200	Class 2	40	1200	200 kg at 600 mm	63
RPC-QR2-50-1800	Class 2	50	1800	250 kg at 900 mm	79
RPC-QR2-60-2800	Class 2	60	2800	340 kg at 1400 mm	113
RPC-QR2-70-2800	Class 2	70	2800	510 kg at 1400 mm	135
RPC-QR2-80-2800	Class 2	80	2800	850 kg at 1400 mm	166
RPC-QR3-70-2800	Class 3	70	2800	510 kg at 1400 mm	190
RPC-QR3-80-2800	Class 3	80	2800	850 kg at 1400 mm	220
RPC-QR3-100-2800	Class 3	100	2800	1700 kg at 1400 mm	282
RPC-BH4-125-1200	Class 4	125	1200	6500 kg at 600 mm	280
RPC-BH4-125-2800	Class 4	125	2800	2785 kg at 1400 mm	440
RPC-BH4-150-1200	Class 4	150	1200	10,000 kg at 600 mm	360
RPC-BH4-150-2800	Class 4	150	2800	4285 kg at 1400 mm	565
RPC-PM-200-1200	Pin Mount	200	1200	13,000 kg at 600 mm	1400


OTHER PRONG LENGTHS AVAILABLE ON REQUEST

Type RPS Slip-on Roll Prong
套入式串杆


Slip on roll prongs are quick and easy to mount on any forklift, although they are better suited to larger capacity forklifts due to the extended load center created by the fork tines. Galvanized or painted finish.

The Safe Working Load (SWL) of this unit varies depending on prong chosen. Please refer to the table below.



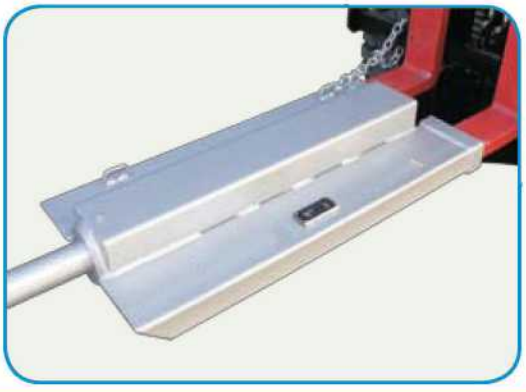

套入式串杆相比挂装式串杆更容易拆装，由于货叉套产生的的载荷中心，适用于更大吨位叉车，用于搬运带有中心孔的货物，如地毯卷、钢带卷、盘钢卷等。表面镀锌或喷漆。

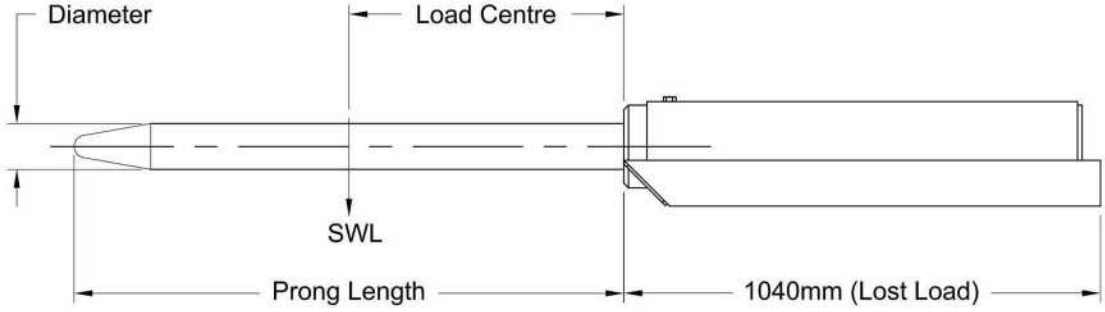

Type 型号	Fork pocket size 货叉套尺寸(mm)	Fork pocket centre 货叉套中心 (mm)	Prong Dia 直径(mm)	Prong Length 长度(mm)	SWL/Load Centre 承载/载荷中心	Weight 净重(kg)
RPS-2N-40-1200	190 x 65	345	40	1200	200 kg at 600 mm	91
RPS-2N-50-1800	190 x 65	345	50	1800	250 kg at 900 mm	106
RPS-2N-60-2800	190 x 65	345	60	2800	340 kg at 1400 mm	141
RPS-2N-70-2800	190 x 65	345	70	2800	510 kg at 1400 mm	163
RPS-2N-80-2800	190 x 65	345	80	2800	850 kg at 1400 mm	194
RPS-3N-100-2800	180 x 80	360	100	2800	1700 kg at 1400 mm	328

OTHER PRONG LENGTHS AVAILABLE ON REQUEST

Please note the Safe Working Load shown has been calculated at the centre of the prong. If the product being lifted exceeds the length of the prong please contact East West Engineering for a revised Safe Working Load.

Type SPE Snow Plough
排雪犁

This snow plough is effective and durable for forklifts, it can clean the snow or some other light obstacles like mud on the road. Adjustable between left, right and straight ahead modes. Galvanized or painted finish.

该产品可用于叉车上，清除道路上的雪块或者淤泥等一些轻型障碍物。可使排雪犁向左向右排雪，前部装有聚氨酯刀板。




Type 型号	Max fork size(mm) 最大货叉套尺寸	Blade Dimension(mm) 排雪板尺寸	Unit Weight(kg) 净重
SPE-12	180x80	684x1200	147
SPE-13	180x80	684x1300	153
SPE-15	180x80	684x1500	164
SPE-18	180x80	684x1800	173
SPE-20	180x80	684x2000	181
SPE-24	180x80	684x2400	199

Other Types Snow Shovel
其他型号排雪犁



SSP-18/20



PXLE-01



PXLST-18/20



PXLB-15/20(mounted on)

Type SPMA Snow Plough
排雪犁

This snow plough is effective and durable for forklifts with capacity 2-5 ton, galvanized or painted finish. Adjustable between left, right and straight ahead modes. It can also be positioned at 30 degree with hydraulic rotation on the right-hand side. It's also the spring loaded plough.

SPMA排雪犁是一款经济实用的叉车属具，2-5吨承载。可调节左右方向。表面喷漆或镀锌处理。



Type 型号	Width(mm) 宽度	Unit Weight(kg) 净重
SPMA2000	2000	205
SPMA2200	2200	220
SPMA2500	2500	240


Type SPR20 Snow Shovel
排雪犁

The snow shovel with rubber that is exchangable, which makes the snow plough last longer. It's simple and easy to change in three positions and the fork channels has fork lock. Galvanized or painted finish.

* 雪铲宽度/Width: 2000mm
* 雪铲高度/Blade height: 450mm
* 净重/Unit weight: 72kg


SPR20排雪犁是一款经济实用的叉车属具，圆弧边缘采用橡胶块设计，磨损后可更换，配有3个方向孔位。表面喷漆或镀锌处理。



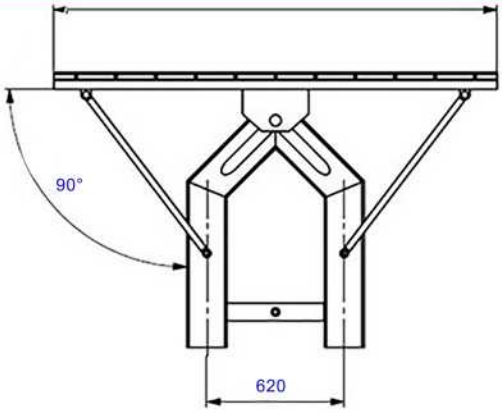


Type IFMS Fork Mounted Sweeper
扫地刷

The fork mounted sweeper is a quick and easy solution for reheaping your loose granule products such as sand, top soil, grain or similar. Interchangeable nylon brushes. Also equip with two tighten belts to fasten with the forklift truck. Optional left and right hand sweep gives you the versatility of cleaning your yard, roadway, footpaths or warehouse. Painted finished.

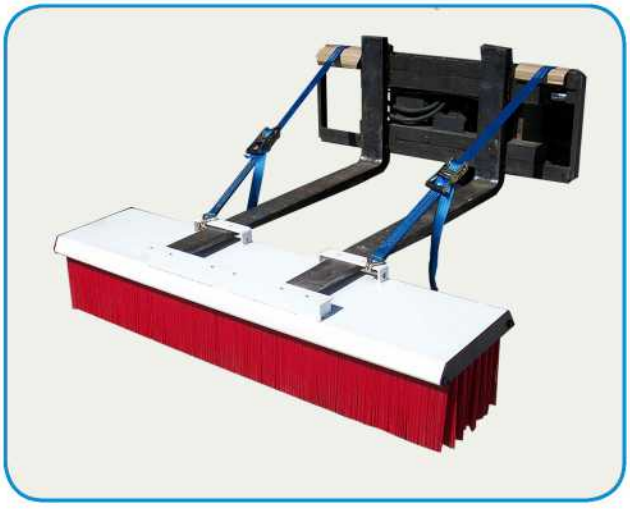

该款套入式扫地刷是一款与叉车配套使用的方便、快速清扫松散垃圾的属具，如沙子、土壤、谷物、纸屑等类似松散物品。尼龙刷磨损后可以更换继续使用，配有2条松紧带，保证使用过程中的稳定性。多用于清扫院子、道路、仓库等地。表面喷漆处理。

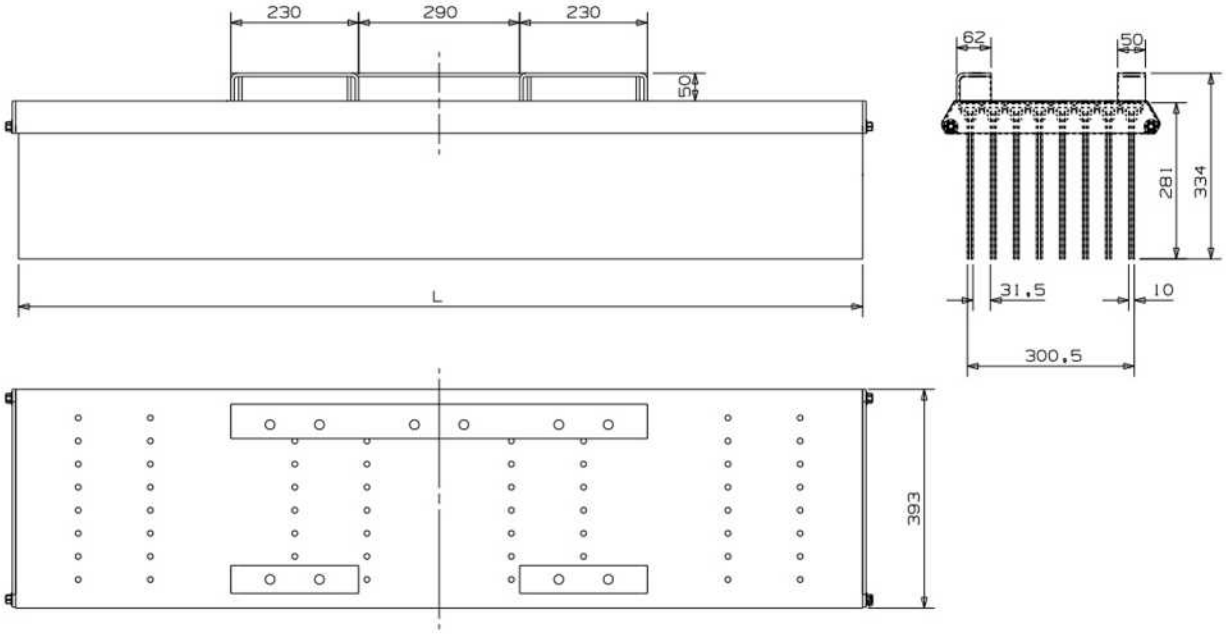

Type 型号	Brush Width(mm) 扫刷宽度	No. of Brushes 扫刷数量	Unit Weight(kg) 净重
IFMS-1200	1200	5	27
IFMS-1520	1520	8	51
IFMS-1800	1800	8	61
IFMS-2450	2450	8	95



Custom size and twist screws for safe attachment to truck type available on request


Type HF Hinged Fork
倾翻叉



Rotational designed, compact structure, excellent driver visibility, motor dexterity. Hydraulic components configuration is reasonable, make good protection of hydraulic system and extend service life. Efficient and safe, tipping speed is stable and reliable, easy maintenance. Hinged fork cylinder installed with hydraulic safety lock, more stable and reliable.

倾翻叉能增大货叉架的前倾与后倾角度倾翻叉与铲斗等容器配合使用可安全高效倾倒容器内的散装货物，广泛应用于物品回收、废料、泥沙、塑料颗粒等需要对料斗倾翻的行业，大大提高了叉车的灵活性和搬运效率。

Type 型号	Class 安装等级	Dimensions(mm) 外形尺寸	Tilt-forward 前倾角度	Tilt-backward 后倾角度	Weight (kg) 重量
HF20	II	1200x1050	45°	25°	300
HF30	III	1200x1050	45°	25°	320
HF40	III	1550x1150	45°	25°	530
HF70	IV	1800x1350	45°	25°	680

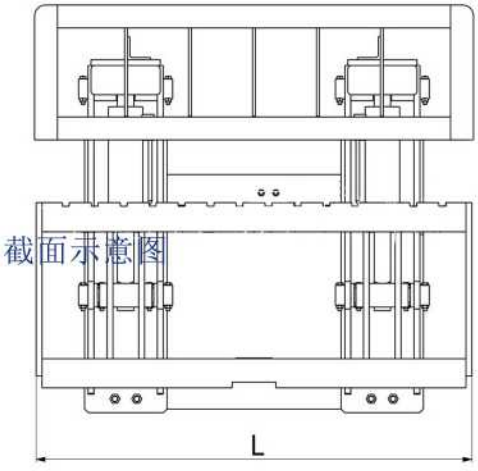








Type FXQ Box Tipper
翻箱器

A bin tipper is an appliance for tipping boxes. Once a forklift truck hauls boxes to the assigned area, it works to dump stuff contained in the boxes, such as fruit and sundries, etc. The product also includes a good viewport, thus makes it convenient, safe and reliable to use and saving human resources.



FXQ型号转轮翻箱器是针对翻转卸空特定尺寸塑料箱设计的。把箱子推到支架上即可进行翻转卸空。操作者无需离开座驾也能简单安全地操作翻转，并且视野极好，保证操作的安全性。

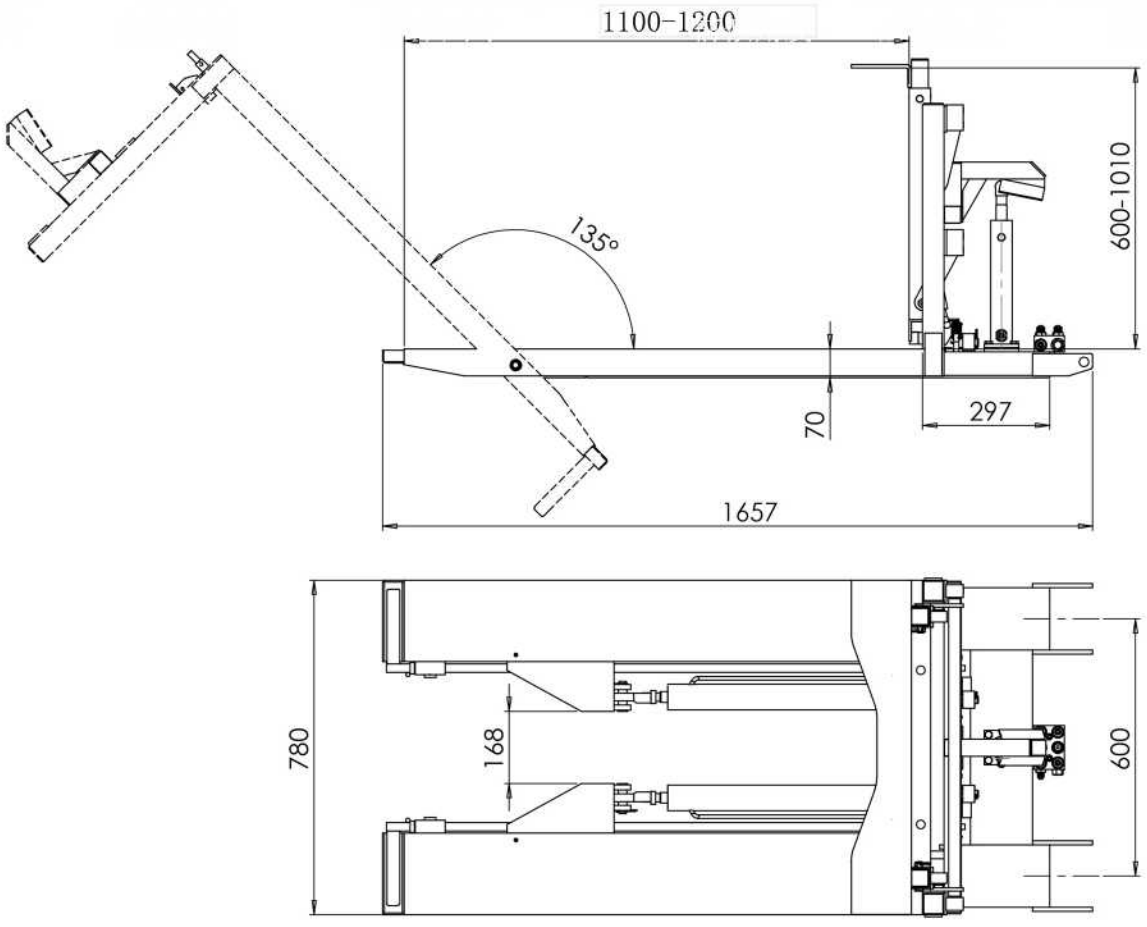

Type 型号	Box size(mm) 箱尺寸	SWL(kg) 承载	Fork pocket centre(mm) 货叉套中心	Max. fork size(mm) 最大货叉尺寸	LC(mm) 载荷中心	Weight(kg) 净重
FXQA-0	1180Lx700-900H	1000	600	125x45	960	180
FXQB-0	1000Lx700-730H	1000	600	125x45	950	161

Type GCN2 Trolley Cage
气瓶推车



Suitable for one type “G” Oxygen and one type “G” Acetylene gas cylinder, with provision to store all hoses inside the cage. The cage is supplied with an internal loadbinder to securely fasten both cylinders. Fitted with handle, crane lift point, and 400mm diameter air inflated rubber wheels, this cage can be transported manually or by crane. Galvanized and painted finish.



该气瓶推车用来搬运工业氧气瓶或乙炔瓶以及连接的气管。推车内配有轧带可固定气瓶，保证安全；外部配有推杆，吊环以及脚轮，可以手动搬运也可与行车搭配使用。

* SWL/安全载荷: 250kg
* Unit weight/重量: 80kg

Type GB-CMA Storage Cage
气瓶储存笼



Secure gas cylinder storage cage suitable for environment such as building sites and mines. Cage is fitted with crane lifting lugs and fork pockets underneath.
Cage is fitted with a lockable door, and has a full metal roof providing weather protection. A securing load binder prevents cylinder movement during transport. Galvanized or painted finish.

* Safe working load/安全载荷: 750kg
* Unit weight/重量: 180kg
* Fork pocket size/货叉套尺寸: 165x65mm
* Fork pocket centre/货叉套中心: 805mm

该气瓶存储笼可用于建筑工地或矿地，配有吊环和货叉套。配有门锁，顶部可防雨雪，内部配有轧带，可固定气瓶，保证使用安全。表面喷漆或镀锌。



Type GB-SC Gas Bottle Storage Cage
气瓶存储笼

The GB-SC gas cylinder cage is designed for storage and transportation of gas cylinders either by forklift or by overhead crane. The cage is fitted with 4 crane lugs and fork access underneath.
This stackable cage is fitted with double 270° opening gates for easy access, and is supplied with load binder to securely fasten cylinders. The cage can be supplied fully assembled or as a flatpack for on-site assembly. Galvanized and painted finish.


该笼可用于气瓶的存储和运输，可用叉车或行车吊，可堆叠。每个笼子都配有2个可开270°的门，方便气瓶的搬运，内部配有轧带固定气瓶。可折叠运输，表面喷漆或镀锌。





Stackable

* SWL/安全载荷: 1000kg
* Unit weight/重量: 170kg

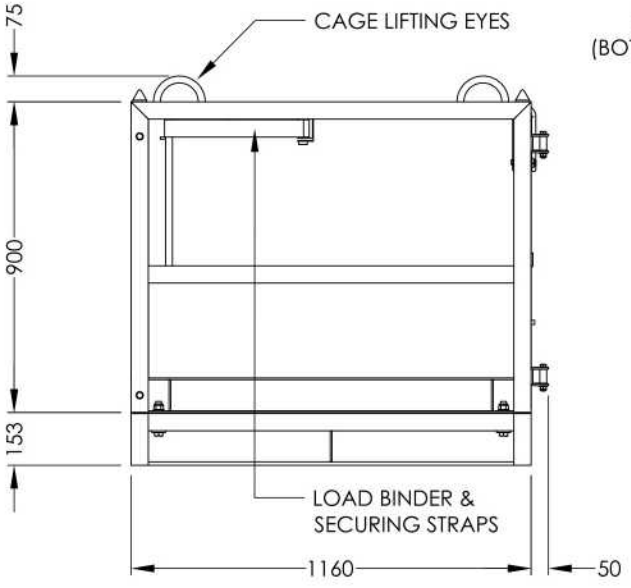





270 degree opening gates


Type TGC2 Gas Bottle Trolley
气瓶推车



The TCG2 gas bottle trolley has been designed to suit one type “G” Oxygen and one type “G” Acetylene gas cylinder. Provision has been made to store all hoses inside the cage. The cage is supplied with an internal loadbinder to securely fasten both cylinders. Fitted with handler and dia.400mm air inflated rubber wheels. This cage can be transported manually or by crane. Galvanized and painted finish.

该气瓶推车用来搬运工业氧气瓶或乙炔瓶以及连接的气管。推车内配有轧带可固定气瓶，保证安全；外部配有推杆，吊环以及脚轮，可以手动搬运也可与行车搭配使用。

* SWL/安全载荷: 250kg
* Unit weight/重量: 55kg

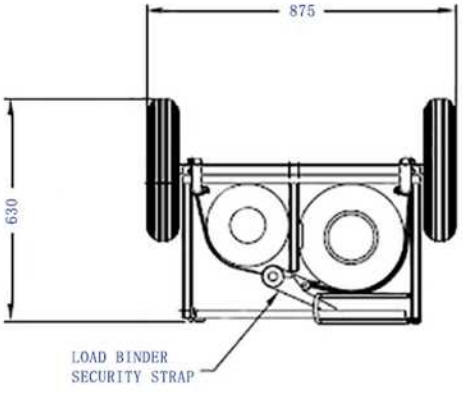

Type GBT Gas Cylinder Trolley
气瓶车



The GBT Gas cylinder trolley can fastly transport an oxygen or acetylene cylinder, painted finish.

* Safe working load/安全载荷: 75kg
* Unit weight/重量: 12kg

本产品可以快速地搬运一个氧气瓶或乙块瓶，表面喷漆。


Type CSPN-01 Goods Cage
货笼（带门）



Safely convey loose or palletised goods using either forklift or crane. Fully which gete allows for 1200mm square pallets to be placed inside. Fitted with crane lifting lugs, fork stirrups and interlocking feet, this versatile cage can also be safely stacked. Galvanized or painted finish.

该货笼可与叉车或行车配套使用，可用来装疏松产品或者托盘产品，最大可与1200mm方形托盘使用，配有吊环、货叉套环。可堆叠使用。

* Safe working load/安全载荷: 1000kg
* Unit weight/重量: 175kg

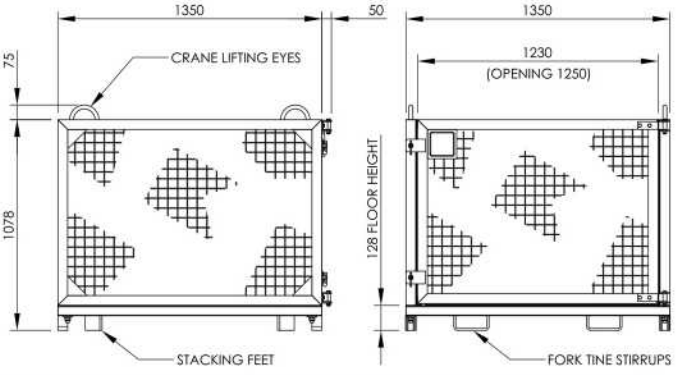




Type CGC-01 Goods Cage(No Gate Fitted
货笼（不带门）




The CGC-01 crane goods cage is a pallet size cage designed to transport goods using eigher a forklift or crane.
Stacking feet underneath the cage allow it to be stacked on top of each other---3 high when empty, 2 high when full. Cage is supplied standard as a flatpack for on site assembly, or may be fully assembled upon request. Galvanized or painted finish.

* Safe working load/安全载荷: 1000kg
* Unit weight/重量: 132kg

该货笼根据托盘尺寸而设计，可与叉车或行车配套使用。该货笼可堆叠，无承载可堆3个，满载情况下可堆2个。可折叠包装运输，节省空间，也可根据客户需求整笼焊接，表面喷漆或镀锌。

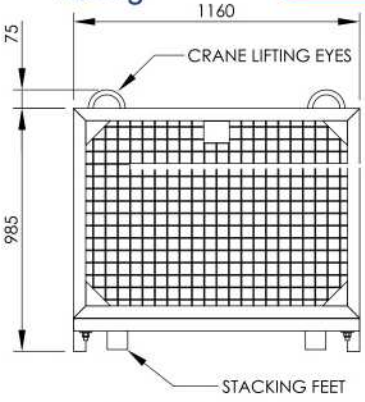

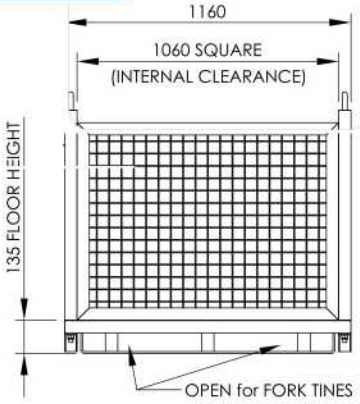

Type BSN6 Brick Cage
储物笼

The BSN6 cage is designed to convey pallets of bricks or similar loose products safely to a work loacation via overhead crane.

Suitable for 1200mm square pallets(1240mm clear inside), and up to 1500mm overall height.The cage can be supplied as fully assembled welded unit BSN6W or as a flat pack for self assembly BSN6F which is then bolted together. Galvanized or painted finish.

BSN货笼设计用于安全传吊整托的砖块或者类似容易散落的货物至指定地点，可与行车、起重机配套使用。适用于1200mm方形托盘，总高度1500mm。该笼的设计可以是完全焊接（型号为BSNW），也可以将部件通过螺丝锁紧（型号为BSN6F），其优点是可以折叠包装，节省运输空间。表面喷漆或镀锌。


* Safe working load/安全载荷: 2000kg
* Lifting points/吊环数量: 4
* Unit weight/重量: 255kg





Flatpack

Type 型号	Inner Width 内宽 (mm)	Inner Depth 内深 (mm)	Inner Height 内高 (mm)	Overall Width 总宽 (mm)	Overall Depth 总深度 (mm)	Overall Heigh 总高 (mm)
BSN-6 - Welded	1240	1240	1500	1340	1340	1720

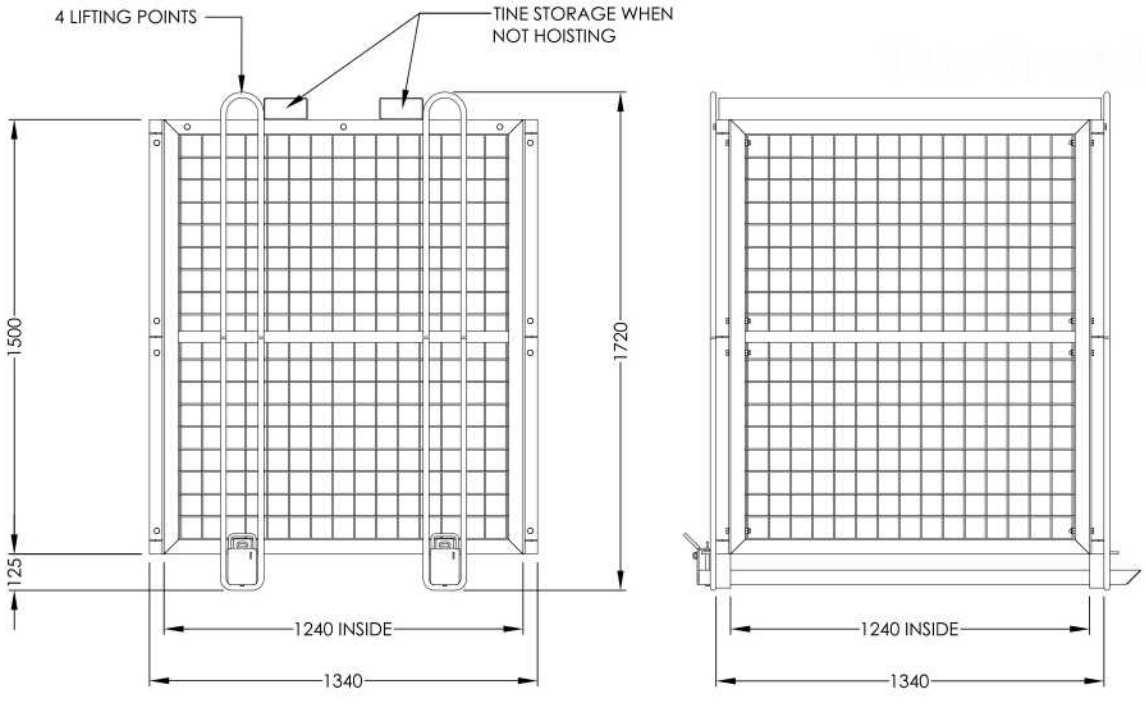

Type WP-GC Goods Cage
货笼


The WP-GC forklift goods cage is suitable for storage and transport of furniture and white-goods, and is ideal for the transportation of goods between ground and mezzanine leels. Galvanized or painted finish.

The WP-GC forklift goods cage is NOT designed or certified to convey personnel.

WP-GC货笼可与叉车配套使用，适合用于储藏和运输家具，家用电器等，适合在楼层与地面之间搬运货物。该货笼不可用来载人使用。表面喷漆或镀锌。


WP-GC 12

* Safe working load/安全载荷: 1000kg
* Fork pocket size/货叉套尺寸: 160x60mm
* Fork pocket centre/货叉套中心: 644mm

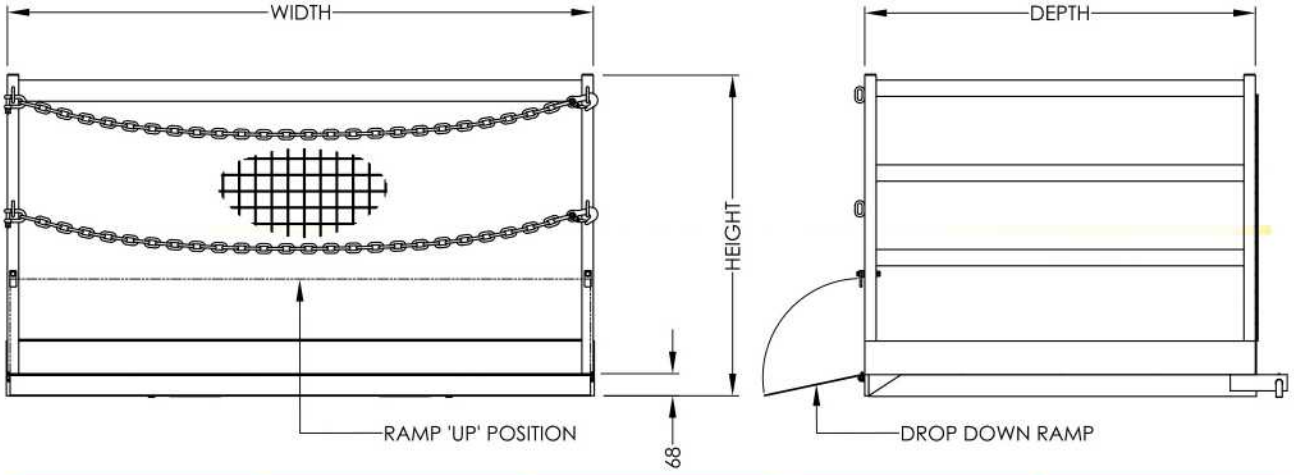

Type型号	W宽(mm)	D深(mm)	H高(mm)	Weight净重
WP-GC 12	1200	1200	1000	150
WP-GC 18	1800	1200	1000	190


WP-GC 18


WP-GC 12

Type PCM-01 Stillage Cage
存储笼





A multi-use pallet size cage, sesigned to suit all warehousing and storage requirements, with the advantage of being quickly dismantled for valuable space saving and transport efficiency.
This durable, economical cage can be transported by forklift or pallet trolley, and can be stacked up to 4 high when empty and 2 high when loaded. Front drop down gate and rear hinge gate are both removable, and are able to be operated for easy access, even when stacked.Unit is supplied flat-packed, galvanized finished.

*承载Load capacity:1000kg
*净重Unit weight: 65kg

该存储笼可用叉车、搬运车运输，满载可堆叠2个，空载可堆叠4个，可折叠运输，表面镀锌。



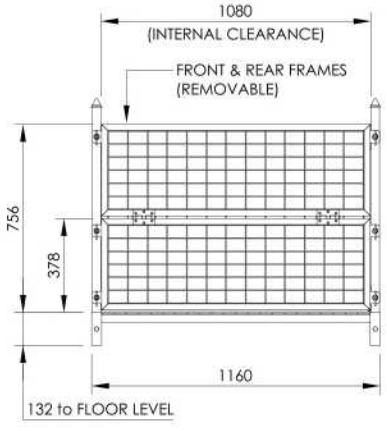

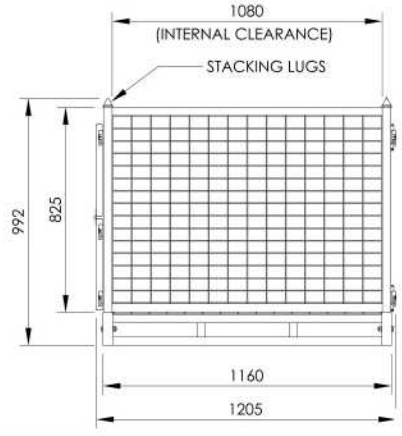

Internal width(mm) 内宽	Internal depth(mm) 内深	Internal height(mm) 内高	Overall width(mm) 总宽	Overall depth(mm) 总深	Overall height(mm) 总高
1080	1080	825	1160	1200	1000












Type PCMH-03 Stillage Cage
存储笼



This stillage cage is a smaller version of the PCM-01, being only half of the height. The cage is fitted with removable front and rear hinged gates, which can be easily opened for access, even when stacked.
Able to be transported by forklift or pallet trolley. This cage can be stacked 4 high when empty and 2 when loaded. Optional sheet metal floor which fits over the existing mesh base frame is available on request, galvanized finished.

*承载Load capacity:1000kg
*净重Unit weight: 53kg

该存储笼相对PCM-01更小，可用叉车、搬运车运输，满载可堆叠2个，空载可堆叠4个，可折叠运输，表面镀锌。

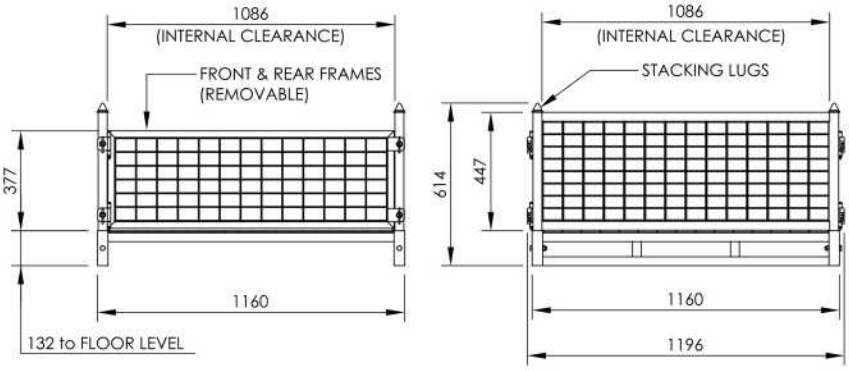

Internal width(mm) 内宽	Internal depth(mm) 内深	Internal height(mm) 内高	Overall width(mm) 总宽	Overall depth(mm) 总深	Overall height(mm) 总高
1080	1080	377	1160	1200	614



Supplied flatpacked





Removable
Hinged Gates



Gates Removed



Optional Sheet Metal Floor

Type PCT-02 Pallet Cage
托盘笼


This pallet cage is designed for safe storage and transport of loose or packaged goods. The side panels are mounted to a standard 1170x1170mm pallet. Front drop down gate and rear hinged gate are both removable and are able to be opened for easy access. Galvanized finished.



*承载Load capacity:2000kg
*净重Unit weight: 75kg


Supplied flatpacked

该托盘笼主要用于存储或运输，装在1170x1170mm托盘上，前后门可打开，方便货物进出，可堆叠。表面镀锌。

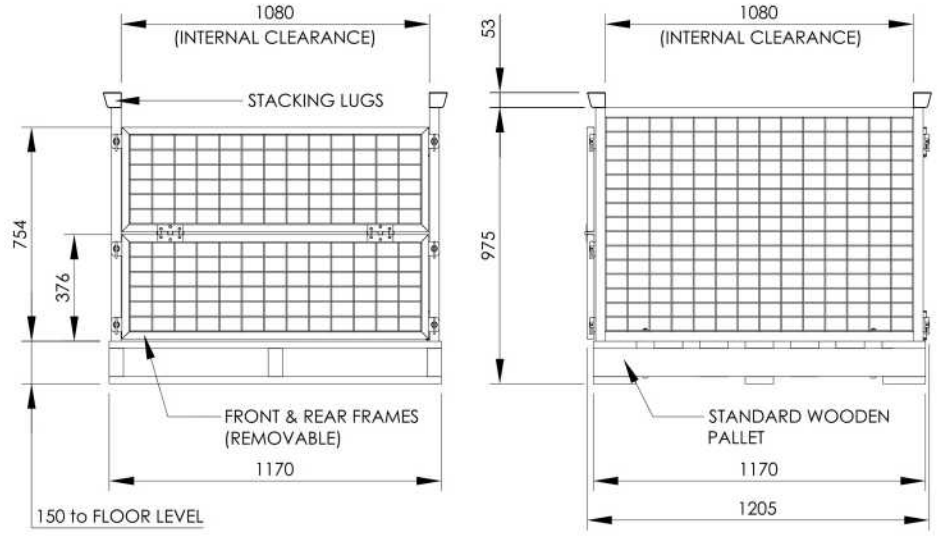

Internal width(mm) 内宽	Internal depth(mm) 内深	Internal height(mm) 内高	Overall width(mm) 总宽	Overall depth(mm) 总深	Overall height(mm) 总高
1080	1080	825	1170	1205	975


Removable Drop Down Gate


Stackable


Gates Removed


Removable Hinged Gate


Optional Sheet Metal Floor


Type MMC-01 Mesh Cage
网状仓储笼



A stackable transport and storage cage, ideal for production, warehousing and component storage applications. Easily collapsible for space saving during transport, the MMC-01 is assembled without any tools in seconds. Cage is fitted with a drop down access gate allowing easy access to the base, even when stacked.
It can transported by forklift or pallet trolley, and can be stacked 2 high when full loaded, making this cage suitable for racking or stand alone application. Front and rear panels are removable. powder coated fram and galvanized insert panels.

*承载Load capacity:1000kg
*净重Unit weight: 53kg

该仓储笼可堆叠是工厂仓库理想的存储笼， 它可折叠运输，安装的时候无需任何工具。其中一扇门设计较低，即使是在堆叠情况下也容易拿取货物。框架喷粉，中网镀锌。

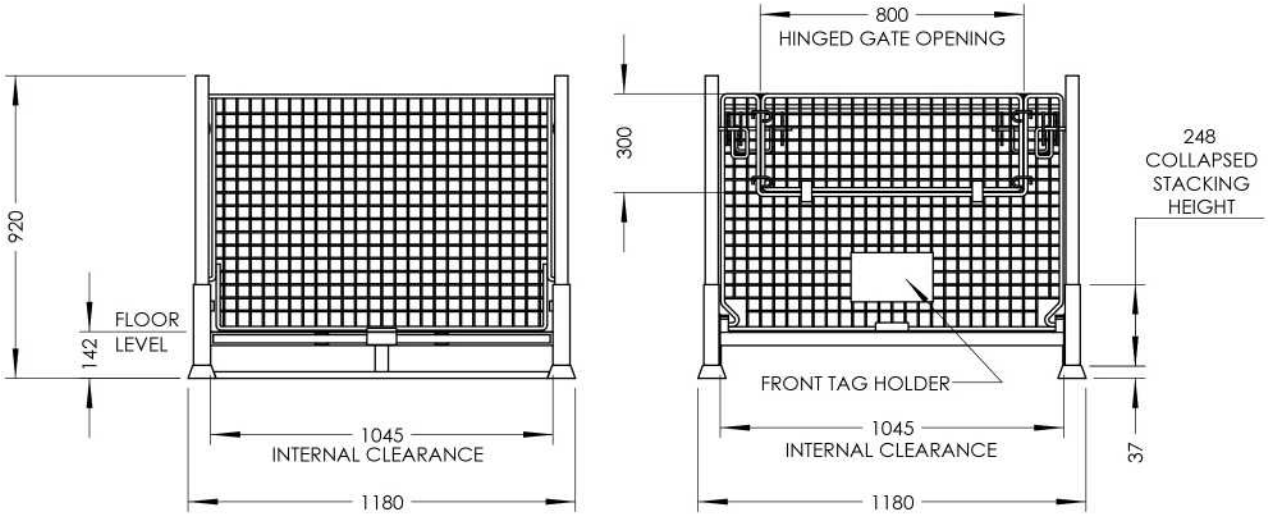

Internal width(mm) 内宽	Internal depth(mm) 内深	Internal height(mm) 内高	Overall width(mm) 总宽	Overall depth(mm) 总深	Overall height(mm) 总高
1080	1080	740	1170	1170	920







Type CK Concrete Kibble
混泥土料斗

Concrete kibbles have been designed for easy transfer of concrete on site by overhead crane.
This lightweight, yet heavy duty kibble can be used for both bottom and side discharge, with the use of the adjustable chute. The unit is lever operated from either side for easy operation, and is also fitted with fork pockets for transport purpose. Enamel painted finish, safety yellow.



CK05


该混泥土料斗设计简易轻便，用于在施工现场运输混泥土，与吊车或塔吊、叉车配合使用。该料斗可从底部或侧部出料，配有可调节输料通道，表面喷漆。

Type 型号	Capacity 容积	SWL 承载	Unit Weight 净重	Filling Height 填料高度	Transport Dimensions(mm) 运输尺寸
CK 05	0.5 cu. m	1500 kg	275 kg	995 mm	1450 x 1540 x 1380 high
CK 10	1.0 cu. m	3000 kg	320 kg	1295 mm	1450 x 1540 x 1680 high


Dual sided discharge lever


CK10 with side discharge chute in position

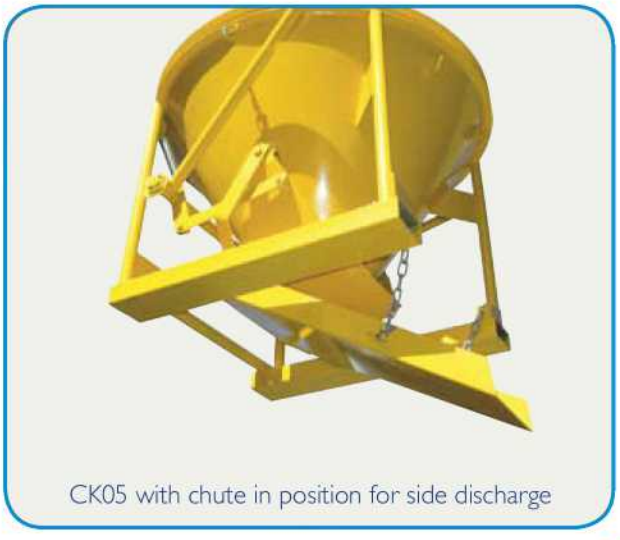
CK05 with chute in position for side discharge

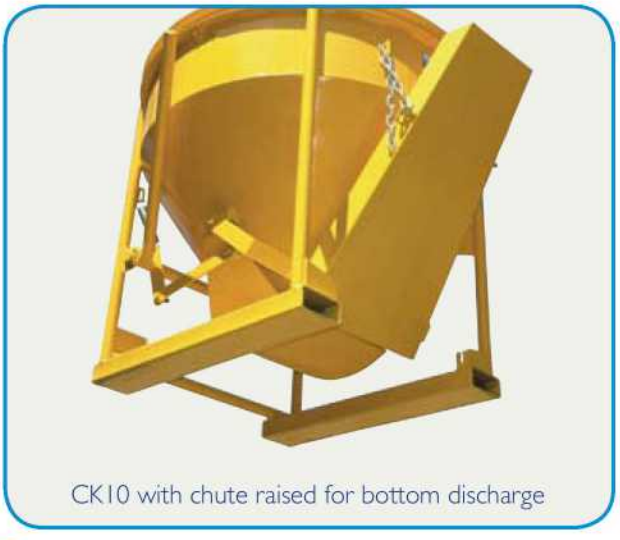
CK10 with chute raised for bottom discharge

Type GK Grout Kibble
混泥土料斗

The GK grout kibble have been designed for bottom dumping of viscous materials including grout or equivalent liquids. The handle positioning and use of a "layflat" hose allows an unobstructed view by the operator of the material pour. The unit is designed with a 300mm diameter butterfly valve to allow the operator to control the pour via the handle. Forklift pockets have been provided for transport about the work site.
The interior of the kibble has a smooth surface allowing for easy discharge and quick cleaning. Enamel painted finish, safety yellow.


GK 10


300mm Butterfly Valve

该混泥土料斗设计简易轻便，用于在施工现场运输混泥土，与吊车或塔吊、叉车配合使用。该料斗底部配有出料管，由一个300mm的控制阀控制出料。料斗内壁光滑，易清洗。配有可调节输料通道，表面喷漆。

Type 型号	Capacity 容积	SWL 承载	Unit Weight 净重	Filling Height 填料高度	Transport Dimensions(mm) 运输尺寸
GK 05	0.5 cu. m	1500 kg	275 kg	1140 mm	1450 x 1450 x 1540 high
GK 10	1.0 cu. m	3000 kg	320 kg	1450 mm	1450 x 1450 x 1840 high

Type CC215 Concrete Collection Tray
混泥土收集托盘

Limit environmental damage onsite by use of the concrete collection tray. This low profile tray fits under the concrete pump to collect spillage washout water and concrete waste. Fitted with fork pockets and crane lugs, the tray is constructed with tapering sides. Galvanized or painted finish.

该混泥土收集托盘可以减少施工现场对施工环境的破坏，将托盘放在混泥土泵站下收集洒落的混泥土、水。配有吊环和货叉套，可与叉车，吊车、塔吊配合使用。表面喷漆或镀锌。

* Safe working load/安全载荷: 1500kg
* Capacity/容积: 0.85m³
* Unit weight/重量: 240kg
* Width/宽度: 2000mm
* Depth/深度: 1500mm
* Height/高度: 375mm



Type SL(C) Spill Bins
溢流托盘/斗

Offering complete protection against damaging and costly chemical spills, SL spill bins are available for 1, 2 or 4x205L drums.
Close spacing support bars allow for large or small drums up to 2000kg SWL to be placed on the spill bin. Painted or galva-nizd finished.


SL 4


SL 2


SL 1


SLC 4

Fitted with a cargo protection shield and safety securing chain, the SLC range offers additional protection against damaging the stored drums. Timber pallets with fit with in the SL(C) 4 spill bin, or durms may be placed directly on the support bars.

该产品的设计是为了保护油桶并收集其溢流出来的油，主要有三种规格的产品：放置1个、2个活4个标准205L的油桶。最大可承载2000kg的油桶。其中型号为SLC的产品添加了油桶保护挡板以及链条，增加了安全性。表面处理喷漆或镀锌。

Type 型号	Drum No. 放桶数量	W(mm) 宽	D(mm) 深	H(mm) 高	Spill capacity 储油量(L)	Unit weight 净重(kg)
SL 1	1	810	760	490	240	55
SL 2	2	1210	610	440	250	60
SL 4	4	1210	1210	265	245	70


Type 型号	Drum No. 放桶数量	W(mm) 宽	D(mm) 深	H(mm) 高	Spill capacity 储油量(L)	Unit weight 净重(kg)
SLC 1	1	810	760	1350	240	105
SLC 2	2	1210	610	1300	250	115
SLC 4	4	1210	1210	1100	245	120

Type RS Drum Racks
油桶架

These racking systems provide a cleaner environment and a safer working area by protecting against costly and dangerous spills. The racking system consists of the bolt together drum rack, and the spill containment tray whcih it stands over. In the event of a spill, the tray can be easily removed without disturbing the drum rack. Each spill tray is fitted with a removable plug for emptying.

该款油桶放置架不同型号可放不同数量油桶，每个架子下面配有一个储油托盘。表面处理喷漆或镀锌。


RS2L

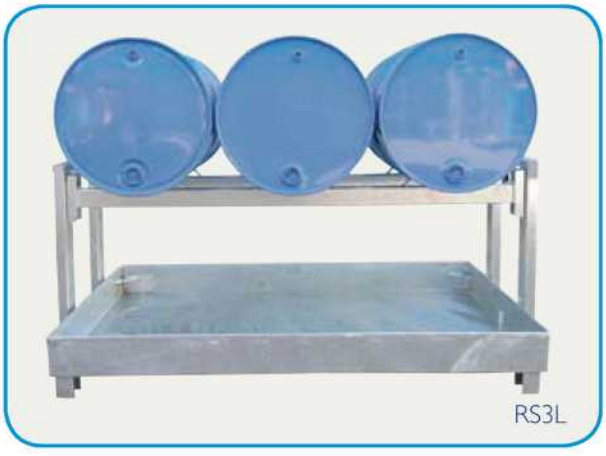
RS3L


RS2-2L


RS3-3L

Type TSC2 Trolley Spill Bins
溢流手推斗

The TSLC2 trolley spill bin is designed to suit one drum. The drum is mounted onto the rack provided for easy drum dispensing.
The spill bin is mounted on four 150mm diameter wheels, 2 fixed and 2 swivel for easy manoeuvring. A drain plug is also provided for draining the bin. Galvanized finish.

*储油量Spill capacity: 230L
*净重Unit weight: 90kg



该款溢流手推车可以防止油桶在搬运过程中漏油。配有2个活动轮和2个固定轮。表面处理喷漆或镀锌。

Type SL-IBC Spill Bins
溢流斗

The SL-IBC range is suited for IBC(Intermediate Bulk Containers). And is available in 3 different sizes to suit most bins available. Painted or galvanizd finished.

该款溢流斗主要适用于如图中型液体物料箱，有不同规格可供客户选择。表面处理喷漆或镀锌。



SL-IBC 1100

Type 型号	W (mm) 宽	D(mm) 深	H(mm) 高	Spill capacity 储油量(L)	Unit weight 净重(kg)
SL-IBC 1100	1360	1510	600	1100	165
SL-IBC 1350	1510	1510	700	1350	190

Type RS-IBC Spill Bins
溢流斗

This unit provides a support frame which allows the IBC to be in a raised position, useful for decanting directly from the IBC, or allowing easy access for hose couplings to the drain valve. Additional support tray also supplied. Painted or galvanized finish.

该款溢流斗配有一个支撑架，使得箱体处于一个高位状态，能够直接从水龙头获取液体。表面处理喷漆或镀锌。



RS-IBC 1100

Type 型号	W (mm) 宽	D(mm) 深	H(mm) 高	Spill capacity 储油量(L)	Unit weight 净重(kg)
RS-IBC 1100	1360	1510	920	1100	190
RS-IBC 1350	1510	1510	1020	1350	230


Type DB Drop Bottom Bin
活底箱

The DB drop bottom bin is a heavy duty unit manufactured from 3mm plate and is reinforced to handle all types of solid waste product. Able to be transported by either forklift or crane, emptying is carried out by pulling the draw rope handle which allows the floor to drop open from one side, allowing complete emptying. Shock absorbing system removes all impact from forklift or crane during emptying. Cast iron or rubber wheels are optional. Painted or galvanized finished.

*最大承载SWL(max): 1000kg
*货叉套尺寸Fork pocket size: 160x65mm
*货叉套中心Fork pocket centre: 684mm


DB 800

DB活底箱是一款与叉车、吊车或行车配套使用的卸载箱。司机可通过绳子拉动侧面杆，使得底部脱钩从而卸载里面的废料，减震系统可使底盖在工作过程中不会撞击叉车。表面喷漆或镀锌处理。

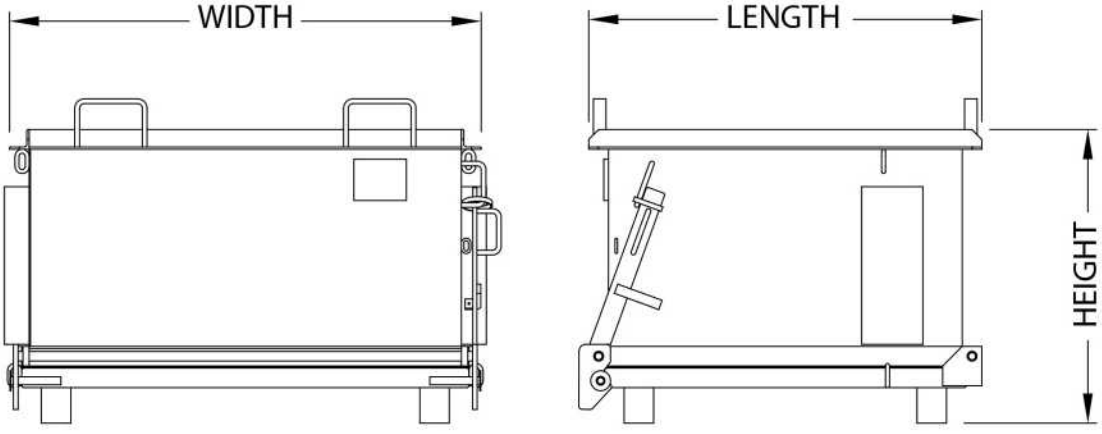

Type 型号	Capacity（m³） 容积	W (mm) 宽	L(mm) 长	H(mm) 高	Unit Weight(kg) 净重
DB 800	0.8	1200	1025	1045	225
DB 1100	1.1	1200	1025	1345	250



DB 1100


DB 800 + Wheels

Type SCB Heavy Duty Crane Bin
重型斗

Heavy duty bins suitable for all waste products. Space saving shape allows bins to nest inside each other for transport and storage. Available in 1T capacity made from 3mm plate or 2T capacity made from 5mm plate. Bins are fitted with 2 or 4 way entry fork pockets allowing for emptying with forklifts fitted with rotator, as well as being fitted with crane lugs and upending lugs for emptying by crane. Cast iron or rubber wheels optional. Painted or galvanized finished.


SCB 212

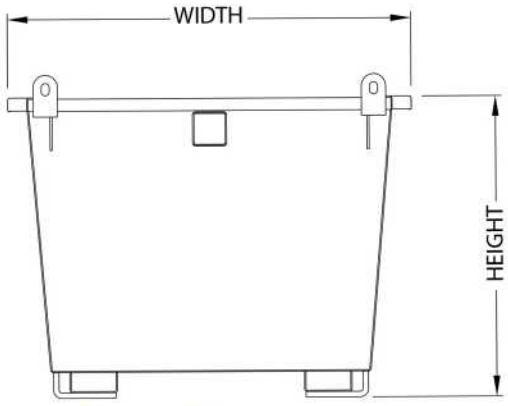


SCB 221 Stacked

该重型斗适用于各种工业废料的收集处理，1吨斗用的是3mm板，2吨斗用的是5mm板。可堆叠运输。底部货叉套可设计成2面或者4面进入，顶底部都配有吊环，既可与行车配套使用，也方便倾倒。如果与叉车配套使用需与带旋转器的叉车使用，可选配脚轮。

Type 型号	Fork pocket size 货叉套尺寸(mm)	Fork pocket centre 货叉套中心(mm)	Capacity(m^3) 容积	SWL (kg) 承载	W(mm) 宽	L(mm) 长	H(mm) 高	Unit Weight 净重(kg)
SCB 112	165 x 65	585	0.75	1000	1200	1230	895	150
SCB 115	165 x 65	865	1.25	1000	1500	1230	1095	180
SCB 121	165 x 65	865	1.80	1000	2100	1230	1095	230
SCB 212	165 x 65	585	0.75	2000	1200	1230	895	220
SCB 215	165 x 65	865	1.25	2000	1500	1230	1095	290
SCB 221	165 x 65	865	1.80	2000	2100	1230	1095	380


Crane Emptying



Forklift Emptying


Type BJFL-1 Bulk Bag Jib
BJFL布袋搬运器

Slip-on jib attachment which is suitable fo handling bulk bags. The jib is fitted with safety swivel hooks, providing complete security when transporting bags. Painted or galvanizd finished.

* 承载Safe working load: 2000kg
* 载荷中心Load centre: 700mm
* 吊钩中心Hock centre: 900mm
* 货叉套Fork Pocket size: 165*65mm
* 货叉套中心Fork pocket centre: 615mm



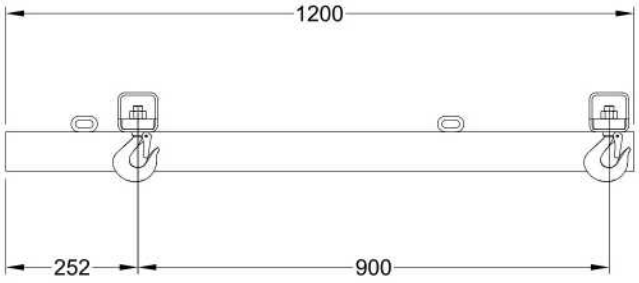

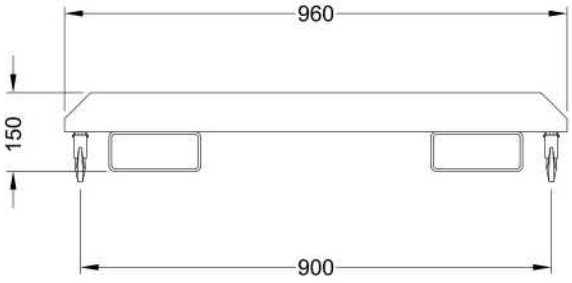


该产品使用简单、方便，并且非常安全，整个操作过程中，叉车司机无需离开座位操作；该产品布袋搬运器与叉车配套使用，用于布袋搬运，配油安全链条，保障搬运过程中的安全。表面处理喷漆或镀锌。


Type BBT-1 Bulk Bag Jib
BBT布袋搬运器

Designed for handling standard “big bag”, this fork mounted attachment allows bags to be lifted by the loops. The loops are located in claws set on each conner enabling quick and easy loading/unloading of bags. Painted or galvanizd finished.

* 承载SWL: 1000kg
* C of G: 662mm
* LLC: 260mm
* 净重Weight: 97kg



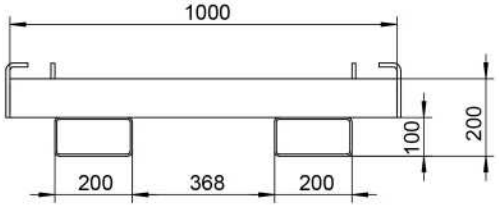

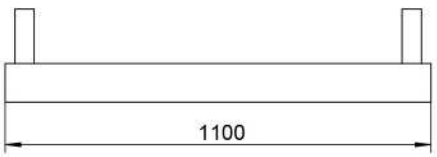


Type BBF4 Bulk Bag Lifter
BBF4布袋搬运器


Suitable for lifting bulk bags by crane or travelling crane. The neighbor hooks distance is 1000mm. Galvaized or painted finished.

* 承载Safe working load: 2000kg
* 净重Unit weight: 55kg


该产品使用简单、方便，与行车、起重机配套使用，用于布袋搬运；相邻吊钩间距为1000mm；表面喷漆或镀锌。

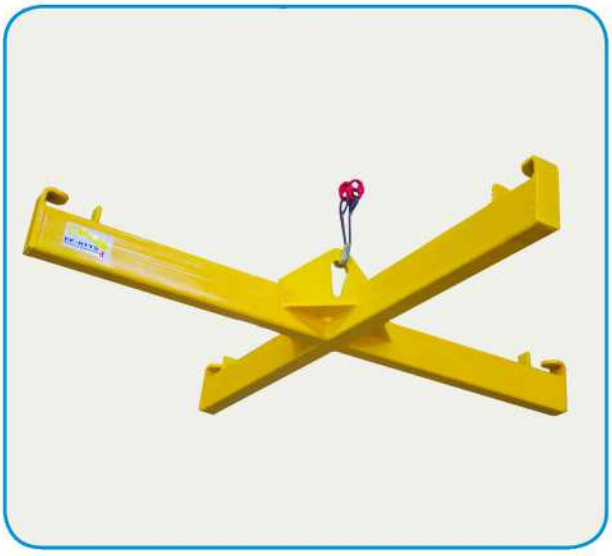

Type BBP2000 Bulk Bag Lifter
BBP2000布袋搬运器

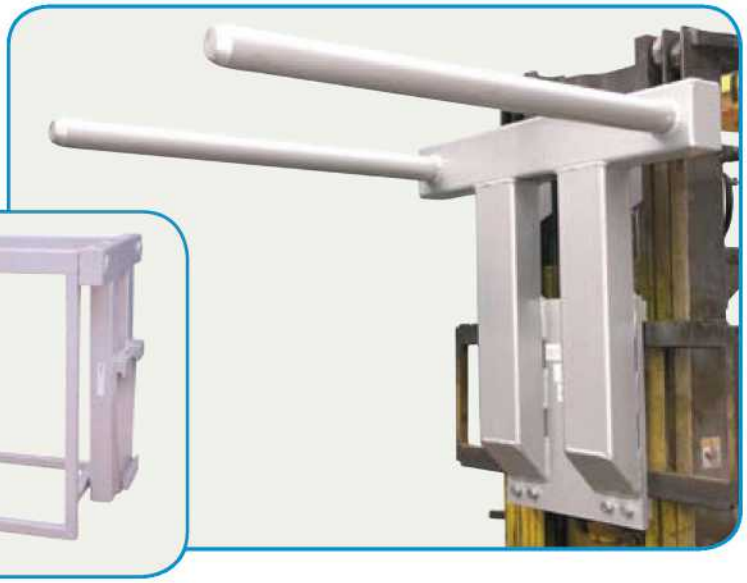



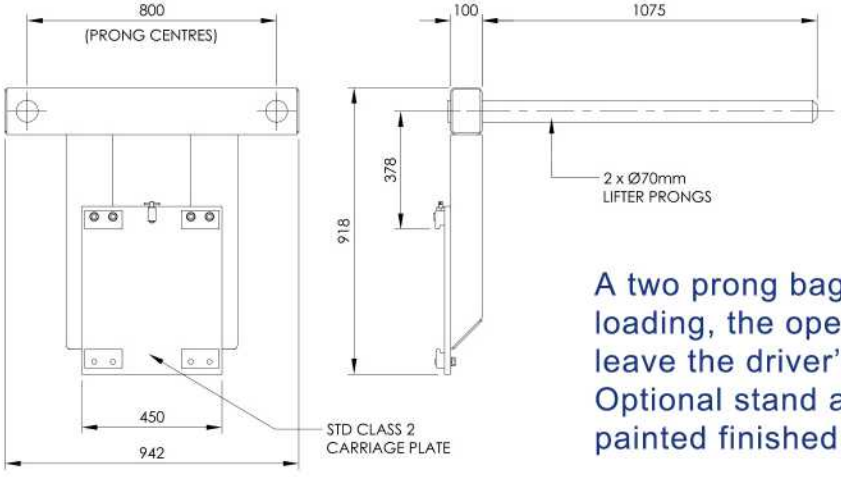

该布袋搬运器适用于袋装装柜，使用简单、方便，可选配专用放置架，方便安装、拆卸和存放；表面喷漆或镀锌。

A two prong bag lifter ideal for container loading, the operator is not required to leave the driver's seat to release the bag. Optional stand available. Galvanized or painted finished.

*承载SWL: 2000kg
*串杆中心距Prong Cnetre: 800mm
*载荷中心Loading Centre: 725mm
*净重Unit Weight: 200kg

Type BBF1000/2000 Big Bag Lifter
布袋搬运器

This slip-on designed big bag lifter is designed for the safe and simple handling of big bags, the lifter incorporates one or two telescopic arms and incorporates pockets for lift truck arms. Painted or galvanizd finished.





BBF系列布袋搬运器采用套入式设计，使用方便，有单个及双个可选，伸缩臂上配有不同挡位，可根据实际情况灵活调节。表面处理喷漆或镀锌。

Type型号	SWL载重(kg)	Max fork size最大货叉尺寸	Install安装方式	Weight净重(kg)
BBF1000	1000	180x60mm	slip-on	90
BBF2000	2000	180x60mm	slip-on	154

Type BBH1000 Big Bag Lifter
布袋搬运器

This mounted-on designed big bag lifter is designed for the safe and simple handling of big bags, the lifter incorporates one telescopic arms, which can adjust the length and height according to the situation. Painted or galvanizd finished.

* 承载SWL: 1000kg
* 安装方式Install: Mounted on
* 净重Weight: 68kg



Type PHA 2000 Pallet Hook
起吊叉


The PHA2000 automatic pallet hook is self levelling for easy operation. The unit self balances using an internal spring mechanism ensuring the lifting eye is in the correct position to keep the fork tines horizontal. Tine width is also adjustable on the PHA2000. Galvanized and painted finish.





* Safe working load/安全载荷: 2000kg
* Unit weight/重量: 196kg
* Load centre/承载中心: 600mm


PHA2000起吊叉是一款可以自我平衡调节的托盘吊叉，实现自我平衡调节是通过内部的一个弹簧机制，可确保吊钩位置保持在中心位置，从而保证货叉的平衡。此外货叉的间距也可以根据货物尺寸调节。表面喷漆或镀锌。

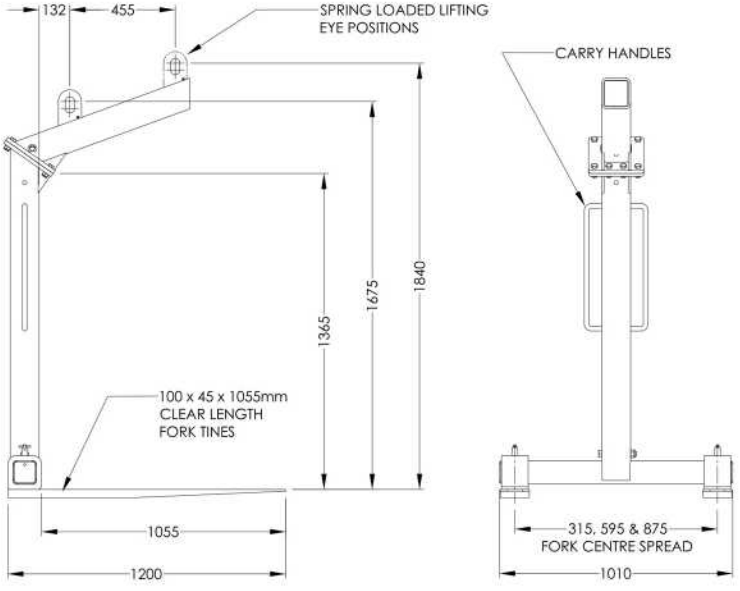

Type PHD 2200 Pallet Hook
起吊叉

The PHD2200 pallet hook is a versatile unit which features adjustable body height and fork tine width positioning, which makes this unit ideal for the transport and construction industry.
Load balancing is carried out by positioning the lifting ring to suit the centre of gravity of the load. Galvanized and painted finish.



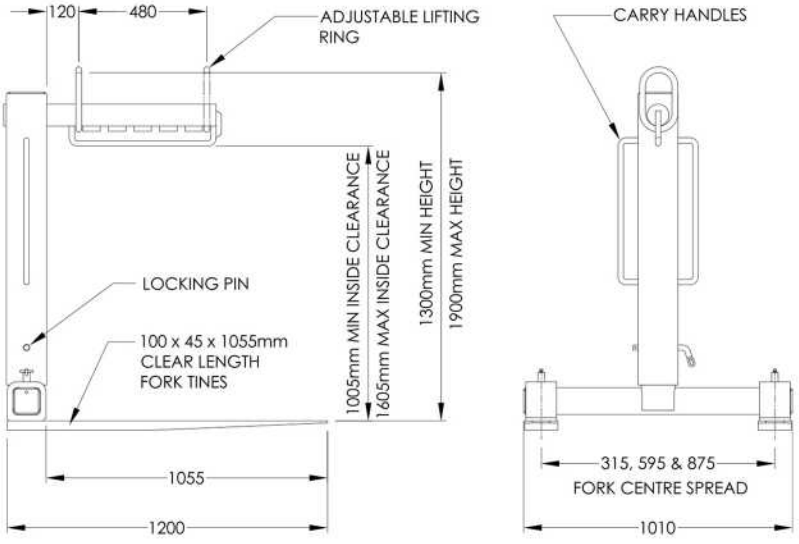


PHD2200起吊叉是一款非常灵活的起吊叉，可调节高度可调节货叉宽度。平衡通过调节吊钩位置调节重心。表面喷漆或镀锌。

* SWL/安全载荷: 2200kg
* Unit weight/重量: 215kg
* LC/承载中心: 600mm

Type PHN4500 Pallet Hook
起吊叉

A heavy duty pallet hook suitable for loads up to 4.5T. Fully adjustable tines out to a maximum of 1200mm make this unit extremely versatile.
Load balancing is carried out by positioning the lifting ring to suit the centre of gravity of the load. Galvanized or painted finish.



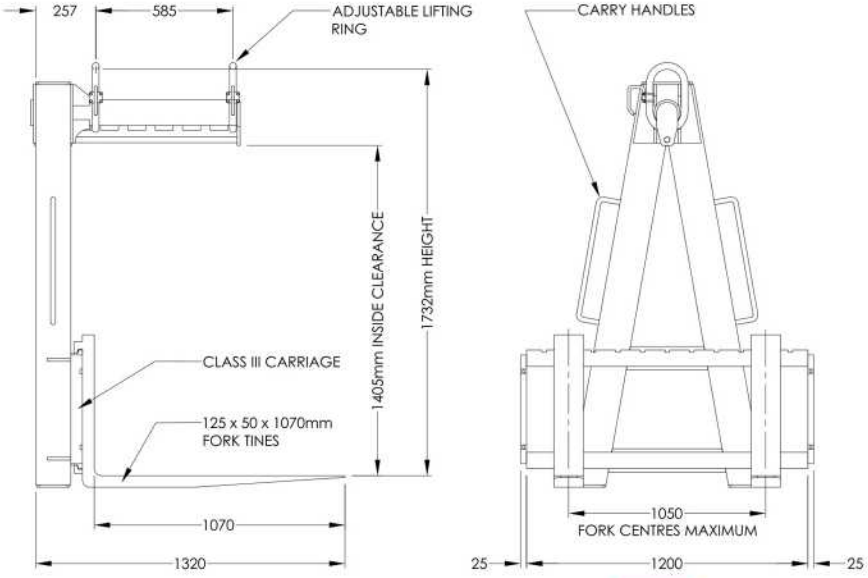

该起吊叉是一款重型起吊叉，可吊4.5吨的货物，货叉最大宽度可调至1200mm;平衡通过调节吊钩位置实现。表面喷漆或镀锌。


* SWL/安全载荷: 4500kg
* Unit weight/重量: 456kg
* LC/承载中心: 600mm

Type CSB Spreader Beam
延伸吊臂



The CSB crane spreader beam is abailable in a range of capacities and length to suit any application. Crane spreader beams are supplied with 5 lift positions and fitted with a safety swivel hooks.
The standard finish on all crane spreader beams is painted enamel in “safety yellow”.
The chart below shows the standard range of crane spreader beams available.
Choose the safe working load and beam length(Dimension ‘A’) to suit your application.

该款延伸吊臂有多款承载、长度可选择，可根据不同工况进行选择。延伸吊臂上配有5个吊钩位置以及2个安全吊钩，可灵活运用。表面喷警示黄颜色。

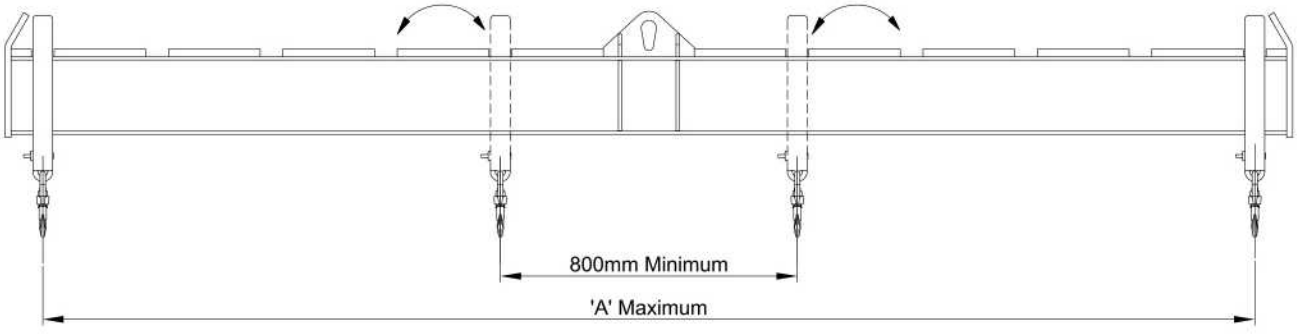

Type 型号	Safe Working Load(kg) 承载	Dimension ‘A’(mm) ‘A’ 尺寸	Unit Weight(kg) 净重
CSB 2x2	2000	2000	70
CSB 3x3	3000	3000	110
CSB 5x4	5000	4000	300
CSB 10x4	10,000	4000	480
CSB 10x7	10,000	7000	1350

CUSTOM SIZE AND CAPACITY AVAILABLE ON REQUEST

Type CFPL-1.5 Spring Pallet Pallift
1.5T旋转托盘平台



Palift is the one of the best way to save workers backs. It automatically keeps the pallet or stillage load at the optimum working height when loading or unloading goods. It has a dramatic impact on reducing the effort required to shift goods. Galvanized or painted finish.
- productivity gains of up to 40%
- Built-in turntable allows simple load rotation and access to all sides
- Standard adjustable feet to allow levelling on uneven surface
- No power, air or maintenance required

CFPL-1.5旋转托盘平台通过弹簧减震机构和旋转机构实现快速、安全装卸托盘上的物品，大大减少人力。弹簧可根据重量要求快速拆装，表面喷漆或镀锌。

* Safe working load/安全载荷: 1.5/2T
* Unit weight/重量: 173kg
* Compress height/最低高度: 230mm
* Extended height/最高高度: 700mm
* Turntable diameter/平台直径: 1200mm


Type TPQ-20D-1500 Pallet Inverter
托盘转换器





The TPQ 180 degree Pallet Inverter is our most popular range of pallet inverters we manufacture. They inverts all load types from bags, drums, boxes, glass, tins and cartons to give you a small example.

TPQ Pallet Inverters are durable, reliable and proven designs, and are supplied to busy warehouses worldwide. Painted finish.

* Safe working load/安全载荷: 250kg
* Load centre/载荷中心: 600mm
* Unit weight/重量: 122kg
* Fork pocket size/货叉套尺寸: 160x65mm
* Fork pocket centre/货叉套中心: 640mm







由叉车或托盘搬运车叉取的托盘类货物，通过该设备可以实现托盘的更换作业。该设备特殊的后倾设计可以保证货物在更换托盘的过程中不会坍塌或变形。该设备具有操作简单、安全的特点。



龙岩市承丰机械制造有限公司
Longyan Chengfeng Machinery Manufacturing Co., Ltd

地址：福建省龙岩市新罗区龙州工业园青云路3号
Add：Qingyun Rd. No.3, Longzhou Industry Park,
Longyan, China
电话Tel: +86 597 2332272
邮箱Email: info@cf-atts.com
网址Web: www.cf-atts.com